

56 Sparta Avenue • Newton, New Jersey 07860
(973) 300-3000 Sales • (973) 300-3600 Fax
www.thorlabs.com



M1450L3 - January 13, 2022

Item # M1450L3 was discontinued on January 13, 2022. For informational purposes, this is a copy of the website content at that time and is valid only for the stated product.

MOUNTED LEDs


- ▶ UV, Visible, and IR Models Available
- ▶ Optimized Heat Management Results in Stable Output
- ▶ Internal SM1 (1.035"-40) Threading
- ▶ Collimation Adapters Available Separately



M405LP1
405 nm LED,
1200 mW Output Power



M505L4
505 nm LED,
400 mW Output Power

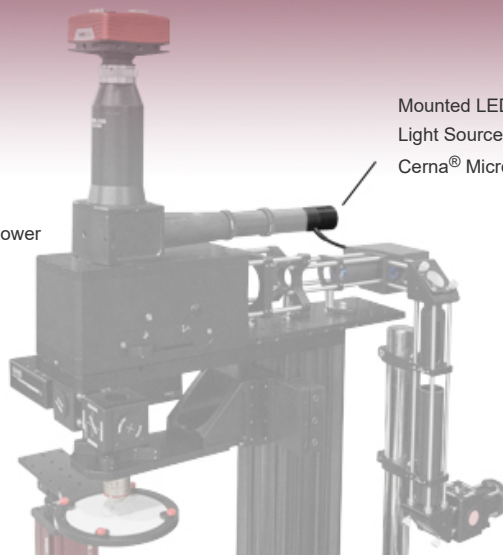

Mounted LED used as a
Light Source for a DIY
Cerna® Microscope

Mounted LED Features

- Wavelengths Ranging from 265 nm to 1650 nm (See LED Quick Links Table to the Right)
- White, Broadband, and Dual-Peak LEDs Also Available
- Integrated Memory Stores LED Operating Parameters
- Thermal Properties Optimized for Stable Output Power
- Microscope- and SM-Thread-Compatible Collimation Adapters Available
- 4-Pin Female Mating Connector for Custom Power Supplies can be Purchased Separately



Click to Enlarge
The MWWHL4 LED and COP1-A microscope collimation adapter used as a trans-illumination source for an Olympus microscope.



Click to Enlarge

Each Thorlabs uncollimated, mounted LED consists of a single LED mounted to the end of a heat sink with 6 mm deep, SM1 (1.035"-40) internal threads. LEDs with Ø1.20" heat sinks have the same outer diameter as an SM1 Lens Tube, allowing them to fit inside a 30 mm Cage System. A selection of our LEDs are mounted to larger heat sinks, as they generate more heat during operation. These heat sinks are enclosed in Ø57.0 mm vented plastic housings and include four 4-40 tapped holes on the front for integration with 30 mm cage systems.

Every LED features an EEPROM chip which stores information about the LED (e.g., current limit, wavelength, forward voltage). When controlled by a Thorlabs DC2200, DC4100, or DC4104 LED driver, the data can be used to implement smart safety features.

These mounted LEDs possess good thermal stability properties, eliminating the issue of degradation of optical output power due to increased LED temperature. For more details, please see the *Stability* tab.

Please note that mounted LEDs are not intended for use in household illumination applications.

LED Collimation

Our adjustable collimation adapters can translate a Ø1" (Ø25 mm) or Ø2" (Ø50 mm) lens by up to 11 mm or 20 mm, respectively. Each adjustable collimation adapter includes an internal SM2 (2.035"-40) thread adapter so that the LEDs can be easily integrated with Thorlabs' SM2-threaded components, such as our Ø2" lens tubes. These adapters are offered in versions with and without an AR-coated aspheric condenser lens.

In addition, microscope collimation adapters are available that incorporate an AR-coated aspheric lens. These adapters mate to the epi-illumination ports on select Leica DMI, Nikon Eclipse Ti, Olympus IX/BX, or Zeiss Axioskop microscopes. Thorlabs also offers mounted LEDs with pre-attached microscope collimation adapters.

We offer suggestions for collimating most LEDs. Click on the info icon (i) for each LED below for details.

Driver Options

Thorlabs offers four drivers compatible with most or all of these LEDs: LEDD1B, DC2200, DC4100, and DC4104 (the latter two require the DC4100-HUB). See the tables below for driver compatibility info. The LEDD1B is capable of providing LED modulation frequencies up to 5 kHz, while DC4100 and DC4104 can modulate the LED at a rate up to 100 kHz. The DC2200 can provide modulation at up to 250 kHz if driven by an external source. In addition, the DC2200,

| Item # | Qty | Description |
|---|-----|---|
| Metric Product List | | |
| M385LP1 | 1 | 385 nm, 1650 mW (Min) Mounted LED, 1700 mA |
| CP33/M | 1 | SM1-Threaded 30 mm Cage Plate, 0.35" Thick, 2 Retaining Rings, M4 Tap |
| TR150/M | 1 | Ø12.7 mm Optical Post, SS, M4 Setscrew, M6 Tap, L = 150 mm |
| ER3-P4 | 1 | Cage Assembly Rod, 3" Long, Ø6 mm, 4 Pack |
| <input type="button" value="Add To Cart"/> <input type="button" value="Export"/> <input type="button" value="Forward"/> | | |

[APPLIST]
[APPLIST]

High-Power LED Inserted into CP33 Cage Plate and Mounted with Ø6 mm Cage Rods



Click to Enlarge
MWWHL4 LED Mounted in an SM1RC Slip Ring

| |
|------------------------------------|
| LED Quick Links |
| Mounted LEDs |
| Deep UV (265 - 340 nm) |
| UV (365 - 405 nm) |
| Cold Visible (420 - 565 nm) |
| Warm Visible (590 - 730 nm) |
| IR (780 - 1650 nm) |
| Purple (455 nm / 640 nm) |
| White (400 - 700 nm) |
| Broadband Mounted LEDs |
| LED Collimation^a |
| Adjustable Collimation Adapters |
| Microscope Collimation Adapters |
| LED Mating Connector |
| LED Drivers |

a. We offer suggestions for how to collimate most of our LEDs. Click on the info icons (i) below for details.

| |
|---|
| Webpage Features |
| Clicking this icon opens a window that contains specifications, mechanical drawings, and information about driver and collimator compatibility. |
| Clicking this icon allows you to download our standard support documentation. |



A mounted LED requires an LED driver to run; a collimation adapter (optional) collimates the diverging beam emitted by the LED. See the tables below to determine the appropriate LED driver. To determine the needed collimation adapter for a given LED, see the info icons (i) below.

DC4100, and DC4104 drivers are capable of reading the current limit from the EEPROM chip of the connected LED and automatically adjusting the maximum current setting to protect the LED.

Multi-LED Source

A customizable multi-LED source may be constructed using our mounted LEDs and other Thorlabs items. This source may be configured for integration with Thorlabs' versatile SM1 Lens Tube Systems and 30 mm Cage Systems. Please see the *Multi-LED Source* tab for a detailed item list and instructions.


Thorlabs also offers integrated, user-configurable 4-Wavelength High-Power LED Sources.

RELATIVE POWER


Relative Power

The actual spectral output and total output power of any given LED will vary due to variations in the manufacturing process and operating parameters, such as temperature and current. Both a typical and minimum output power are specified to help you select an LED that suits your needs. Each mounted LED will provide at least the minimum specified output power at the maximum current. In order to provide a point of comparison for the relative powers of LEDs with different nominal wavelengths, the spectra in the plots below have been scaled to the minimum output power for each LED. This data is representative, not absolute. An Excel file with normalized and scaled spectra for all of the mounted LEDs can be downloaded [here](#).


Deep UV LED Spectra Scaled to Min Power

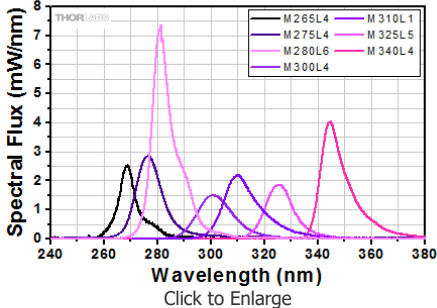


UV LED Spectra Scaled to Min Power

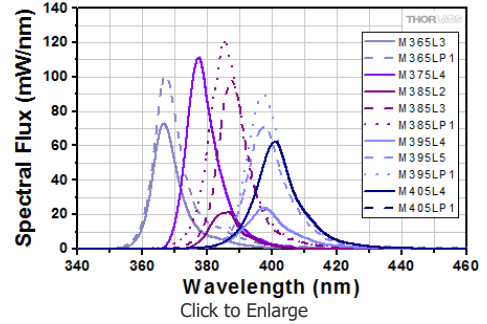


Visible LED Spectra Scaled to Min Power

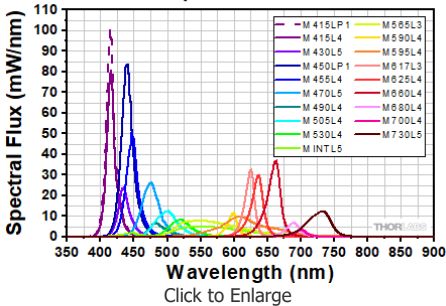


IR LED Spectra Scaled to Min Power

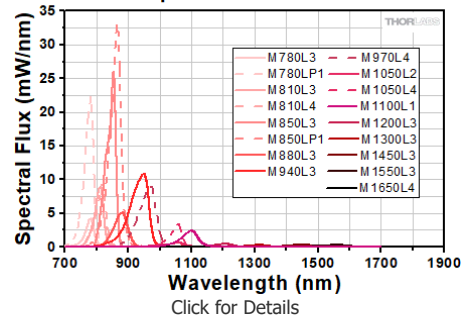


White LED Spectra Scaled to Min Power

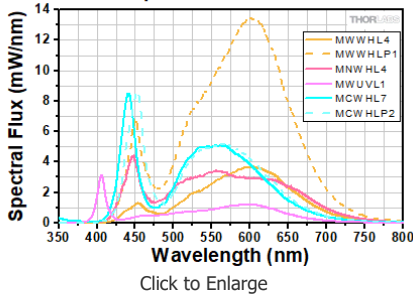

Purple LED Spectrum Scaled to Min Power

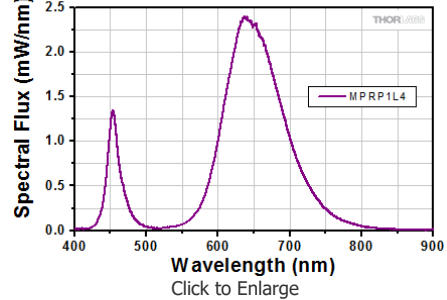


Broadband LED Spectra Scaled to Min Power

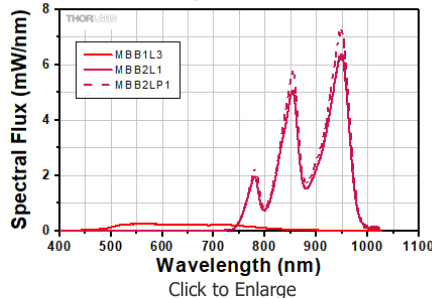

STABILITY


LED Lifetime and Long-Term Power Stability

One characteristic of LEDs is that they naturally exhibit power degradation with time. Often this power degradation is slow, but there are also instances where large, rapid drops in power, or even complete LED failure, occur. LED lifetimes are defined as the time it takes a specified percentage of a type of LED to fall below some power level. The parameters for the lifetime measurement can be written using the notation B_{XX}/L_{YY} , where XX is the percentage of that type of LED that will provide less than YY percent of the specified output power after the lifetime has elapsed. Thorlabs defines the lifetime of our LEDs as B_{50}/L_{50} , meaning that 50% of the LEDs with a given item # will fall below 50% of the initial optical power at the end of the specified lifetime. For example, if a batch of 100 LEDs is rated for 150 mW of output power, 50 of these LEDs can be expected to produce an output power of ≤ 75 mW after the specified LED lifetime has elapsed.



The thermal dissipation performance of these mounted LEDs has been optimized for stable power output. The heat sink is directly mounted to the LED mount so as to provide optimal thermal contact. By doing so, the degradation of optical output power that can be attributed to increased LED junction temperature is minimized (see the graph to the left).

Optimized Thermal Management




Click to Enlarge
 Our 340 nm mounted LED has a typical lifetime of >3,000 hours. In this case, the unit under test continued to provide more than 90% of its initial power after 45 days.

The sample plot to the right shows example data from long-term stability testing over a 45 day period for a 340 nm mounted LED, which had a lifetime of >3,000 hours (~125 days). The small power drop experienced by the LED after it is turned on is typical behavior during the first few minutes of operation. It corresponds to the period of time required for the LED to warm up to the point where it is thermally stable. Please note that this graph represents the performance of a single LED; the performance of individual LEDs will vary within the stated specifications.

COLLIMATION

Obtaining a Well-Collimated Beam

After installing the chosen collimation package on a mounted LED, the distance between the lens and the LED may need to be adjusted to ensure that the LED is properly collimated. A well-collimated beam has minimal divergence and will not converge at any point in the beam path (see images below for comparison). Be advised that, due to the high emitter surface area of the LED, the output beam cannot be perfectly collimated. Divergence data for select LEDs is provided in the below table as a reference; see the info icons () below for the recommended collimating optic for each LED.


1. Power on the LED and check to see if it is properly collimated. It is easiest to check that the beam is collimated by noting the changes in the beam diameter over a range of about 1" to 2 feet away; change the distance of the lens from the LED and check again. Do this until the least divergent, non-converging, homogenous beam is obtained. The beam should be somewhat circular, may have a slightly polygonal shape, and should not be a clear image of the LED itself.
2. If you see an image of the LED, this means that the lens is not close enough to the LED. Move the lens closer to the LED until the image blurs and becomes homogenous – this is the point of collimation. Note: If the lens needs to be closer to the LED when using the DIY collimation assembly, use one retaining ring to secure the lens against the internal lip of the SM1V05.



Click to Enlarge
Image of the LED



Click to Enlarge
Uncollimated Beam



Click to Enlarge
Collimated Beam

3. Once the proper collimation position of the lens has been found, lock the position of the lens in place.

The table below provides examples of how the half viewing angle changes for select LEDs with the addition of a Ø1" aspheric condenser lens.

| Item # | Color | Nominal Wavelength ^a | Optimum Lens to Emitter Distance ^b | Half Viewing Angle ^c | | |
|--------|-------|---------------------------------|---|---------------------------------|------------------------------|---------------------------------|
| | | | | +1 mm Out of Focus ^d | at Optimum Focusing Distance | -1 mm Out of Focus ^d |
| M385L2 | UV | 385 nm | 12.8 mm | 2.68° | 1.33° | 3.06° |
| M850L3 | IR | 850 nm | 13.8 mm | 3.29° | 3.10° | 3.93° |
| M940L3 | IR | 940 nm | 13.9 mm | 3.42° | 2.46° | 3.70° |

- a. The specifications listed in the table above are nominal values specified by the LED manufacturer.
- b. Optimum distance between the respective mounted LED and the ACL2520U lens used to collimate the beam.
- c. Power loss to $1/e^2$ (13.5%).
- d. ± 1 mm out of focus from Optimum Distance between the respective mounted LED and the ACL2520U lens used to collimate the beam.

The divergence data was calculated using Zemax.

PIN DIAGRAM

Pin Connection - Male

The diagram to the right shows the male connector of the mounted LED assembly. It is a standard M8 x 1 sensor circular connector. Pins 1 and 2 are the connection to the LED. Pin 3 and 4 are used for the internal EEPROM in these LEDs. If using an LED driver that was not purchased from Thorlabs, be careful that the appropriate connections are made to Pin 1 and Pin 2 and that you do not attempt to drive the LED through the EEPROM pins.



| Pin | Specification | Color |
|-----|---------------|-------|
| 1 | LED Anode | Brown |
| 2 | LED Cathode | White |
| 3 | EEPROM GND | Black |
| 4 | EEPROM IO | Blue |

Creating a Custom Multi-LED Source for Microscope Illumination

Thorlabs offers the items necessary to create your own custom multi-LED light source using two or three of the mounted LEDs offered below. As configured in the following example, the light source is intended to be used with the illumination port of a microscope. However, it may be integrated with other applications using Thorlabs' versatile SM1 Lens Tube and 30 mm Cage Systems. Thorlabs also offers integrated, user-configurable 4-Wavelength LED Sources.



Click to Enlarge
Multi-LED Source Coupled to Microscope
Illumination Port

Design & Construction

First, light will be collimated by lenses mounted in lens tubes. Dichroic mirrors mounted in kinematic cage cubes then combine the output from the multiple LEDs. The mounted LEDs may be driven by LEDD1B Compact T-Cube LED Drivers (power supplies are sold separately). The LEDD1B LED Drivers allow each LED's output to be independently modulated and can provide up to 1200 mA of current. Please take care not to drive the LED sources above their max current ratings.

When designing your custom source, select mounted LEDs from below along with dichroic mirror(s) that have cutoff wavelength(s) between the LED wavelengths. The appropriate dichroic mirror(s) will reflect light from side-mounted LEDs and transmit light along the optical axis. Please note that most of these dichroic mirrors are "longpass" filters, meaning they transmit the longer wavelengths and reflect the shorter wavelengths. To superimpose light from three or more LEDs, add each in series (as shown below), starting from the back with longer wavelength LEDs when using longpass filters. Shortpass filters may also used if the longer wavelength is reflected and the shorter wavelength is transmitted. Sample combinations of compatible dichroic mirrors and LEDs are offered in the three tables below.

It is also necessary to select an aspheric condenser lens for each source with AR coatings appropriate for the source. Before assembling the light source, collimate the light from each mounted LED as detailed in the *Collimation* tab. For mounting the aspheric lenses in the SM1V05 Lens Tubes using the included SM1RR retaining rings, we recommend the SPW801 Adjustable Spanner Wrench. A properly collimated LED source should have a resultant beam that is approximately homogenous and not highly divergent at a distance of approximately 2 feet (60 cm). An example of a well-collimated beam is shown on the *Collimation* tab.

After each LED source is collimated, thread the SM1V05 Lens Tubes at the end of each collimated LED assembly into their respective C4W Cage Cube ports using SM1T2 Lens Tube Couplers. Install each dichroic filter in an FFM1 Dichroic Filter Holder, and mount each filter holder onto a B4C Kinematic Cage Cube Platform. Each platform is then installed in the C4W Cage Cubes by partially threading the included screws into the bottom of the cube, and then inserting and rotating the B4C platform into place. Align the platform to the desired position and then firmly tighten the screws. To connect multiple cage cubes and the microscope adapter, use the remaining SM1T2 lens tube couplers along with an SM1L05 0.5" Lens Tube between adjacent cage cubes. Finally, adjust the rotation, tip, and tilt of each B4C platform to align the reflected and transmitted beams so they overlap as closely as possible.

If desired, a multi-LED source may be constructed that employs more than three LEDs. The limiting factors for the number of LEDs that can be practically used are the collimation of the light and the dichroic mirror efficiency over the specified range. Heavier multi-LED sources may be supported with our Ø1" or Ø1.5" Posts.



Click to Enlarge
Three-LED Source Using Components Mounted LEDs and Dichroic Mirrors
Detailed in Example Configuration 1

| Parts List | | | | | |
|------------|---------------------|------------------|--------|-----------|--------|
| # | Product Description | | Item # | 2 LEDs | 3 LEDs |
| | | | | Item Qty. | |
| 1 | Microscope | Olympus IX or BX | SM1A14 | 1 | 1 |



Click to Enlarge
Beam Profile of Source with 3
Mounted LEDs




Click to Enlarge
Two-LED source. This is
the same as Example 1,
but with the blue LED
removed.





| Quantity | Part Name | Part # | Quantity | Quantity |
|----------|--|-------------------------|---------------------------|----------|
| | Port Adapter: | | | |
| | | Leica DMI | SM1A21 | |
| | | Zeiss Axioskop | SM1A23 ^a | |
| | | Nikon Eclipse Ti | SM1A26 | |
| 2 | Mounted LED ^b | - | 2 | 3 |
| - | T-Cube LED Driver, 1200 mA Max Drive Current | LEDD1B ^c | 2 | 3 |
| - | 15 V Power Supply Unit for T-Cube | KPS101 ^c | 2 | 3 |
| 3 | 4-Way Mounting 30 mm Cage Cube | C4W | 1 | 2 |
| 4 | Kinematic Cage Cube Platform for C4W/C6W | B4C | 1 | 2 |
| 5 | 30 mm Cage-Compatible Dichroic Filter Mount | FFM1 | 1 | 2 |
| 6 | Dichroic Filter(s) ^d | - | 1 | 2 |
| 7 | Externally SM1-Threaded End Cap | SM1CP2 | 1 | 2 |
| 8 | SM1 (1.035"-40) Coupler, External Threads, 0.5" Long | SM1T2 | 3 | 5 |
| 9 | Ø1" SM1 Lens Tube, 1/2" Long External Threads | SM1V05 | 2 | 3 |
| - | Aspheric Condenser Lens | AR-Coated 350 - 700 nm | ACL2520U-A ^{c,e} | 2 |
| | | AR-Coated 650 - 1050 nm | ACL2520U-B ^{c,e} | |
| 10 | SM1 Lens Tube, 0.3" Thread Depth | SM1L03 | 2 | 4 |
| - | Blank Cover Plate with Rubber O-Ring for C4W/C6W | B1C ^c | 1 | 2 |

- a. The SM1A23 Zeiss Axioskop Microscope Adapter is shown.
- b. Mounted LEDs are available below.
- c. Item not pictured.
- d. Please see the following tables for suggested compatible LED and dichroic filter combinations, or create your own by taking into account the transmission and reflection wavelength ranges of our Dichroic Filters.
- e. Lenses are mounted in the SM1V05 Lens Tube in front of each LED. For each lens, select an AR coating corresponding to the emission wavelength of the LED source.

| Example Configuration 1 | | Example Configuration 2 | | Example Configuration 3 | |
|-------------------------|----------|-------------------------|----------|-------------------------|----------|
| Mounted LEDs | | Mounted LEDs | | Mounted LEDs | |
| # | Item # | # | Item # | # | Item # |
| 2a | M625L4 | 2a | M625L4 | 2a | M1050L2 |
| 2b | M530L4 | 2b | M455L4 | 2b | MCWHL7 |
| 2c | M455L4 | 2c | M1050L2 | Dichroic Filter(s) | |
| Dichroic Filter(s) | | Dichroic Filter(s) | | # | Item # |
| # | Item # | # | Item # | 6a | DMLP900R |
| 6a | DMLP605R | 6a | DMLP505R | | |
| 6b | DMLP505R | 6b | DMSP805R | | |

RAY DATA

Ray data for Zemax is available for some of the bare LEDs incorporated into these high-powered light sources. This data is provided in a zipped folder that can be downloaded by clicking on the red document icons () next to the part numbers in the pricing tables below. Every zipped folder contains an information file and one or more ray files for use with Zemax:

| Item # | Information File | Available Ray Files | File Size | Click to Download |
|----------------------------|---------------------------|--|-----------|---|
| M385L2 | M385_Info.pdf | 1 Million Rays and 5 Million Rays | 148 MB |  |
| M450LP1^a | LD_CQAR_20150731_info.pdf | 100,000 Rays, 500,000 Rays, and 5 Million Rays | 123 MB |  |
| M850L3^a | SFH4715S_100413_info.pdf | 100,000 Rays, 500,000 Rays, and 5 Million Rays | 140 MB |  |
| M940L3^a | SFH_4725S_110413_info.pdf | 100,000 Rays, 500,000 Rays, and 5 Million Rays | 140 MB |  |

a. A radiometric color spectrum, bare LED CAD file, and sample Zemax file are also available for these LEDs.

- **Information File:** This document contains a summary of the types of data files included in the zipped folder and some basic information about their use. It includes a table listing each document type and the corresponding filenames.
- **Ray Files:** These are binary files containing ray data for use with Zemax.

For the LEDs marked with an superscript "a" in the table to the right, the following additional pieces of information are also included in the zipped folder:

- **Radiometric Color Spectrum:** This .spc file is also intended for use with Zemax.
- **CAD Files:** A file indicating the geometry of the bare LED. For the dimensions of the high-power mounted LEDs that include the package, please see the support drawings provided by Thorlabs.
- **Sample Zemax File:** A sample file containing the recommended settings and placement of the ray files and bare LED CAD model when used with Zemax.

The table to the right summarizes the ray files available for each LED and any other supporting documentation provided.


Using Mounted LEDs in Cerna® Microscope Systems

Mounted LEDs, which can have either narrowband or broadband spectra, are useful for a range of applications within Thorlabs' Cerna microscopy platform:

- Fluorescence Microscopy
- Brightfield Microscopy
- Near Infrared/Infrared (NIR/IR) Microscopy

| Components for Cerna® Compatibility |
|-------------------------------------|
| Epi-Illumination |
| WFA2001 Epi-Illuminator Module |
| Trans-Illumination |
| Illumination Kits |

If you are interested in using a mounted LED with a Cerna modular microscopy system, the mounted LED can be attached by way of the single-cube epi-illuminator module (Item # WFA2001), which contains AR-coated optics optimized for the 350 - 700 nm wavelength range. The mounted LED and epi-illuminator module are connected together by an externally threaded coupler (Item # SM1T10, provided with the WFA2001), which includes two knurled locking rings (Item # SM1NT, also provided with the WFA2001) that are tightened by hand. The mounted LED is then powered by a driver, sold separately. Please see the *LED Drivers* tab to identify the appropriate driver for your mounted LED. If you wish to connect multiple mounted LEDs to the epi-illuminator module, contact Technical Support.



Click to

Enlarge

An exploded view of the mounted LED and its connection with the WFA2001 epi-illuminator module.



Click to

Enlarge

Attaching the mounted LED is possible before or after connecting the epi-illuminator module to the microscope.



Click to






Enlarge

The mounted LED and epi-illuminator module attached to the Cerna microscope.

Please see the *Overview* tab to choose the appropriate color spectrum of mounted LED for your imaging needs. Again, note that the epi-illuminator module is optimized for 350 - 700 nm wavelength illumination sources.










Certain mounted LEDs are also compatible with our illumination kits for trans-illumination. Please contact Technical Support if you wish to use an LED not currently offered as a component of these kits, as the collimating optics are optimized for certain beam characteristics.

LED DRIVERS

| Compatible Drivers | UPLED ^a | LEDD1B | DC2200 ^a | DC4100 ^{a,b,c} | DC4104 ^{a,b,c} |
|--|---|---|---|---|---|
| Click Photos to Enlarge |  |  |  |  |  |
| LED Driver Current Output (Max) | 1.2 A | 1.2 A | LED1 Terminal: 10.0 A LED2 Terminal: 2.0 A ^d | 1.0 A per Channel | 1.0 A per Channel |
| LED Driver Forward Voltage (Max) | 8 V | 12 V | 50 V | 5 V | 5 V |
| Modulation Frequency Using External Input (Max) | - | 5 kHz | 250 kHz ^{e,f} | 100 kHz ^f (Simultaneous Across all Channels) | 100 kHz ^f (Independently Controlled Channels) |
| External Control Interface(s) | USB 2.0 | Analog (BNC) | USB 2.0 and Analog (BNC) | USB 2.0 and Analog (BNC) | USB 2.0 and Analog (8-Pin) |
| Main Driver Features | USB-Controlled | Very Compact Footprint 60 mm x 73 mm x 104 mm (W x H x D) | Touchscreen Interface with Internal and External Options for Pulsed and Modulated LED Operation | 4 Channels ^c | 4 Channels ^c |
| EEPROM Compatible: Reads Out LED Data for LED Settings | ✓ | - | ✓ | ✓ | ✓ |
| LCD Display | - | - | ✓ | ✓ | ✓ |

- a. Automatically limits to LED's max current via EEPROM readout.
- b. The DC4100 and DC4104 can power and control up to four LEDs simultaneously when used with the DC4100-HUB. The LEDs on this page all require the DC4100-HUB when used with the DC4100 or DC4104.
- c. These LED drivers have a maximum forward voltage rating of 5 V and can provide a maximum current of 1000 mA. As a result, they cannot be used to drive LEDs which have forward voltage ratings greater than 5 V. LEDs with maximum current ratings higher than 1.0 A can be driven using this driver, but will not reach full power.
- d. The mounted LEDs sold below are compatible with the LED2 Terminal.
- e. Small Signal Bandwidth: Modulation not exceeding 20% of full scale current. The driver accepts other waveforms, but the maximum frequency will be reduced.
- f. Several of these LEDs produce light by stimulating emission from phosphor, which limits their modulation frequencies. The M565L3, M595L4, and all purple or white LEDs may not turn off completely when modulated above 10 kHz at duty cycles below 50%. The MBB1L3 LED may not turn off completely when modulated at frequencies above 1 kHz with a duty cycle of 50%. When the MBB1L3 is modulated at frequencies above 1 kHz, the duty cycle may be reduced; for example, 10 kHz modulation is attainable with a duty cycle of 5%.

Light Emitting Diode (LED) Selection Guide

| (Click Representative Photo to Enlarge; Not to Scale) |  |  |  |  |  |  |  |  |  |  |
|---|---|---|---|---|---|--|---|---|---|---|
| Wavelength | Unmounted LEDs | Pigtailed LEDs | LEDs in SMT Packages | PCB-Mounted LEDs | Heatsink-Mounted LEDs | Collimated LEDs for Microscopy ^a | Fiber-Coupled LEDs ^b | High-Power LEDs for Microscopy | Multi-Wavelength LED Source Options ^c | LED Array |
| Single Color LEDs | | | | | | | | | | |
| 250 nm | LED250J (1 mW Min) | - | - | - | - | - | - | - | - | - |
| 255 nm | LED255W (0.4 mW) | - | - | - | - | - | - | - | - | - |
| | LED255J (1 mW Min) | | | | | | | | | |
| 260 nm | LED260W (1 mW) | - | - | - | - | - | - | - | - | - |
| | LED260J (1 mW Min) | | | | | | | | | |
| 265 nm | LED265W2 (1.6 mW) | - | - | M265D3 (24 mW Min) | M265L4 (24 mW Min) | - | - | - | - | - |
| 275 nm | LED275W (1.6 mW) | - | - | M275D2 (45 mW Min) | M275L4 (45 mW Min) | - | - | - | - | - |
| | LED275J (1 mW Min) | | | M275D3 (47.3 mW Min) ^d | | | | | | |
| 280 nm | LED280W (2.3 mW) | - | - | - | M280L6 (78 mW Min) ^d | - | M280F5 (0.5 mW Min) ^d | - | - | - |
| 285 nm | LED285W (1.6 mW) | - | - | M285D3 (50 mW Min) | - | - | - | - | - | - |
| | LED285J (1.3 mW) | | | | | | | | | |
| 290 nm | LED290W (1.6 mW) | - | - | - | - | - | - | - | - | - |
| 295 nm | LED295W (1.2 mW) | - | - | - | - | - | - | - | - | - |
| 300 nm | LED300W (1.2 mW) | - | - | M300D3 (26 mW Min) | M300L4 (26 mW Min) | - | M300F2 (320 μW) | - | - | - |
| 308 nm | - | - | - | M310D1 (38.5 mW Min) ^d | M310L1 (38.5 mW Min) ^d | - | M310F1 (0.51 mW) ^d | - | - | - |
| 310 nm | LED310W (1.5 mW) | - | - | - | - | - | - | - | - | - |
| 325 nm | LED325W2 (1.7 mW) | - | - | M325D3 (25 mW Min) | M325L5 (25 mW Min) | - | M325F4 (350 μW) | - | - | - |
| 340 nm | LED340W (1.7 mW) | - | - | M340D3 (53 mW Min) | M340L4 (53 mW Min) | - | M340F3 (1.06 mW) | - | - | - |
| | LED341W (0.33 mW) | | | | | | | | | |
| 365 nm | - | - | - | M365D2 (1150 mW Min) | M365L3 (880 mW Min) | M365L2-Cx (60 mW) ^e | M365FP1 (15.5 mW) | SOLIS-365C (3.0 W) ^f | Chrois (1130 mW) | LIU365 (31 mW) |
| | | | | | M365LP1 (1350 mW Min) | M365LP1-Cx (350 mW) ^e | | | 4- Wavelength Source (85 mW) | |

Light Emitting Diode (LED) Selection Guide

| | | | | | | | | | | |
|-------------------|-----------------------|-----------------------|-----------------------------|-------------------------|------------------------------|---|---------------------------------------|---------------------------------------|--|------------------|
| 375 nm | LED375L (1 mW) | - | - | M375D4 (1270 mW Min) | M375L4 (1270 mW Min) | - | M375F2 (4.23 mW) | - | - | - |
| | LED370E (2.5 mW) | | | | | | | | | |
| 385 nm | LED385L (5 mW) | - | - | M385D1 (270 mW Min) | M385L2 (270 mW Min) | M385L2-Cx (90 mW) ^e | M385F1 (10.7 mW) | SOLIS-385C (5.8 W) ^f | Chrolis (1250 mW) | - |
| | | | | | M385L3 (1240 mW Min) | M385L3-Cx (450 mW) ^e | | | | |
| | | | | M385D2 (1650 mW Min) | M385LP1 (1650 mW Min) | M385LP1-Cx (520 mW) ^e | M385FP1 (23.2 mW) | | | |
| 395 nm | LED395L (6 mW) | - | - | M395D3 (400 mW Min) | M395L4 (400 mW Min) | - | M395F3 (6.8 mW) | - | - | - |
| | | | | M395D4 (1420 mW Min) | M395L5 (1130 mW Min) | | M395FP1 (29.8 mW) | | | |
| | | | | | M395LP1 (1420 mW Min) | | | | | |
| Wavelength | Unmounted LEDs | Pigtailed LEDs | LEDs in SMT Packages | PCB-Mounted LEDs | Heatsink-Mounted LEDs | Collimated LEDs for Microscopy^a | Fiber-Coupled LEDs^b | High-Power LEDs for Microscopy | Multi-Wavelength LED Source Options^c | LED Array |

Single Color LEDs

| | | | | | | | | | | |
|--------|---------------------|--------------------------|---------------------|---------------------------------------|---------------------------------------|-------------------------------------|---------------------------------|------------------------------------|--|--------------------|
| 405 nm | LED405L (6 mW) | - | - | M405D2 (1500 mW Min) | M405L4 (1000 mW Min) | M405L4-Cx (510 mW) ^g | M405F1 (3.7 mW) | SOLIS-405C (3.9 W) ^f | Chrolis (900 mW) | - |
| | LED405E (10 mW) | | | | M405LP1 (1200 mW Min) | M405LP1-Cx (450 mW) ^e | M405FP1 (24.3 mW) | | 4- Wavelength Source (290 mW) | |
| 415 nm | - | - | - | M415D2 (1640 mW Min) | M415L4 (1310 mW Min) | - | M415F3 (21.3 mW) | SOLIS-415C (5.8 W) ^f | - | - |
| | | | | | M415LP1 (1640 mW Min) | | | | | |
| 420 nm | - | - | - | - | - | - | - | - | Chrolis (710 mW) | - |
| | | | | | | | | | 4- Wavelength Source (95 mW) | |
| 430 nm | LED430L (8 mW) | - | - | M430D3 (529.2 mW Min) ^d | M430L5 (529.2 mW Min) ^d | - | M430F1 (7.5 mW) ^d | - | - | - |
| 445 nm | - | - | - | - | - | - | - | SOLIS-445C (5.4 W) ^f | - | - |
| 450 nm | LED450L (7 mW) | - | LEDS450 (250 mW) | M450D3 (1850 mW Min) | M450LP1 (1850 mW Min) | - | - | - | - | - |
| 455 nm | - | - | - | M455D3 (1150 mW Min) | M455L4 (1150 mW Min) | M455L3-Cx (400 mW) ^h | M455F3 (24.5 mW) | - | 4- Wavelength Source (310 mW) | - |
| | | | | | | M455L4-Cx (490 mW) ^e | | | | |
| 465 nm | LED465E (20 mW) | - | - | - | - | - | - | - | - | - |
| 470 nm | LED470L (170 mW) | EP470S04 (18 mW Min) | - | M470D4 (809 mW Min) ^d | M470L5 (809 mW Min) ^d | M470L5-Cx (402 mW) ^e | M470F3 (21.8 mW) | SOLIS-470C (3.0 W) ^f | 4- Wavelength Source (250 mW) | LIU47C (253 mW) |
| | | EP470S10 (100 mW Min) | | | | | | | | |
| 475 nm | - | - | - | - | - | - | - | - | Chrolis (630 mW) | - |

Light Emitting Diode (LED) Selection Guide

| | | | | | | | | | | |
|--------------------------|--|--------------------------|-----------------------------|-------------------------|------------------------------|---|---------------------------------------|---------------------------------------|--|--------------------|
| 490 nm | LED490L (3 mW) | - | - | M490D3 (205 mW Min) | M490L4 (205 mW Min) | - | M490F3 (3.1 mW) | - | Chrolis (120 mW) | - |
| | | | | | | | | | 4- Wavelength Source (50 mW) | |
| 505 nm | LED505L (4 mW) | - | - | M505D3 (400 mW Min) | M505L4 (400 mW Min) | M505L3-Cx (150 mW) ^e | M505F3 (11.7 mW) | SOLIS-505C (1.0 W) ^f | 4- Wavelength Source (170 mW) | - |
| | | | | | | M505L4-Cx (170 mW) ^e | | | | |
| 525 nm | LED525E (2.6 mW Max) | - | - | - | - | - | - | SOLIS-525C (2.4 W) ^f | Chrolis (180 mW) | LIU525 (111 mW) |
| | LED525L (4 mW) | | | | | | | | | |
| | LED528EHP (7 mW) | | | | | | | | | |
| 530 nm | - | - | - | M530D3 (370 mW Min) | M530L4 (370 mW Min) | M530L4-Cx (160 mW) ^e | M530F2 (9.6 mW) | - | 4- Wavelength Source (100 mW) | - |
| 545 nm | LED545L (2.4 mW CW, 8.7 mW Pulsed) | - | - | - | - | - | - | - | - | - |
| 554 nm | - | - | - | MINTD3 (650 mW Min) | MINTL5 (650 mW Min) | - | MINTF4 (28 mW) | - | - | - |
| 562 nm | LED560L (0.15 mW) ^d | - | - | - | - | - | - | - | - | - |
| 565 nm | - | - | - | M565D2 (880 mW Min) | M565L3 (880 mW Min) | - | M565F3 (13.5 mW) | SOLIS-565C (3.2 W) ^f | Chrolis (350 mW) | - |
| | | | | | | | | | 4- Wavelength Source (106 mW) | |
| 570 nm | LED570L (0.3 mW) | - | - | - | - | - | - | - | - | - |
| 590 nm | LED590L (2 mW) | EP590S04 (3.5 mW Min) | - | M590D3 (230 mW Min) | M590L4 (230 mW Min) | M590L3-Cx (60 mW) ^e | M590F3 (4.6 mW) | SOLIS-590C (350 mW) ^f | Chrolis (140 mW) | LIU59C (109 mW) |
| | LED591E (2 mW) | EP590S10 (18 mW Min) | | | | M590L4-Cx (100 mW) ^e | | | 4- Wavelength Source (65 mW) | |
| 595 nm | - | - | - | M595D3 (820 mW Min) | M595L4 (820 mW Min) | - | M595F2 (11.5 mW) | SOLIS-595C (700 mW) ^f | - | - |
| Wavelength | Unmounted LEDs | Pigtailed LEDs | LEDs in SMT Packages | PCB-Mounted LEDs | Heatsink-Mounted LEDs | Collimated LEDs for Microscopy^a | Fiber-Coupled LEDs^b | High-Power LEDs for Microscopy | Multi-Wavelength LED Source Options^c | LED Array |
| Single Color LEDs | | | | | | | | | | |
| 600 nm | LED600L (3 mW) | - | - | - | - | - | - | - | - | - |
| 610 nm | LED610L (8 mW) | - | - | - | - | - | - | - | - | - |
| 617 nm | - | - | - | M617D2 (600 mW Min) | M617L3 (600 mW Min) | M617L3-Cx (230 mW) ^e | M617F2 (13.2 mW) | SOLIS-617C (1.5 mW) ^f | 4- Wavelength Source (210 mW) | - |
| | | | | M617D3 (660 mW Min) | | M617L4-Cx (280 mW) ^e | | | | |
| 620 nm | - | - | - | - | - | - | - | SOLIS-620D (3.47 W) ^f | - | - |

Light Emitting Diode (LED) Selection Guide

| | | | | | | | | | | |
|--------|---------------------|-------------------------|---|------------------------|--------------------------|------------------------------------|-------------------------------------|------------------------------------|--|---------------------------------|
| 625 nm | LED625L (12 mW) | - | - | M625D3 (700 mW Min) | M625L4 (700 mW Min) | M625L3-Cx (270 mW) ^e | M625F1 (17.5 mW) | - | Chrolis (490 mW) | - |
| | | | | | | M625L4-Cx (490 mW) ^e | | | 4- Wavelength Source (240 mW) | |
| 630 nm | LED630L (16 mW) | - | - | - | - | - | - | - | - | LIU63C (208 m ^l) |
| 635 nm | LED631E (4 mW) | - | - | - | - | - | - | - | - | - |
| | LED635L (170 mW) | | | | | | | | | |
| 639 nm | LED630E (7.2 mW) | - | - | - | - | - | - | - | - | - |
| 645 nm | LED645L (16 mW) | - | - | - | - | - | - | - | - | - |
| 660 nm | LED660L (13 mW) | - | - | M660D2 (940 mW Min) | M660L4 (940 mW Min) | M660L4-Cx (400 mW) ^e | M660FP1 (15.5 mW) | SOLIS-660C (2.0 W) ^f | 4- Wavelength Source (210 mW) | - |
| 670 nm | LED670L (12 mW) | - | - | - | - | - | - | - | - | - |
| 680 nm | LED680L (8 mW) | - | - | M680D2 (180 mW Min) | M680L4 (180 mW Min) | - | M680F3 (2.7 mW) | - | - | - |
| 700 nm | - | EP700S04 (5 mW Min) | - | M700D2 (80 mW Min) | M700L4 (80 mW Min) | - | M700F3 (1.7 mW) | - | - | - |
| | | EP700S10 (30 mW Min) | | | | | | | | |
| 730 nm | - | - | - | M730D3 (540 mW Min) | M730L5 (540 mW Min) | - | - | - | - | - |
| 740 nm | - | - | - | - | - | - | M740F2 (6.0 mW) | SOLIS-740C (2.0 W) ^f | - | - |
| 750 nm | LED750L (18 mW) | - | - | - | - | - | - | - | - | - |
| 760 nm | LED760L (24 mW) | - | - | - | - | - | - | - | - | - |
| 770 nm | LED770L (22 mW) | - | - | - | - | - | - | - | - | - |
| 780 nm | LED780E (18 mW) | - | - | M780D2 (200 mW Min) | M780L3 (200 mW Min) | M780L3-Cx (130 mW) ^e | M780F2 (7.5 mW) | - | Chrolis (40 mW) | LIU78C (315 m ^l) |
| | LED780L (22 mW) | | | M780D3 (800 mW Min) | M780LP1 (800 mW Min) | | | | | |
| 800 nm | LED800L (20 mW) | - | - | - | - | - | - | - | - | - |
| 810 nm | LED810L (22 mW) | EP810S04 (16 mW Min) | - | M810D2 (325 mW Min) | M810L3 (325 mW Min) | M810L3-Cx (210 mW) ^e | M810F2 (6.5 mW) | - | - | - |
| | | EP810S10 (90 mW Min) | | M810D3 (363 mW Min) | M810L4 (363 mW Min) | | | | | |
| 830 nm | LED830L (22 mW) | - | - | - | - | - | - | - | - | - |
| 840 nm | LED840L (22 mW) | - | - | - | - | - | - | - | - | - |
| 850 nm | LED851L (13 mW) | - | - | M850D2 (900 mW Min) | M850L3 (900 mW Min) | M850L3-Cx (330 mW) ^e | M850F3 (8.6 mW Min) ^d | SOLIS-850C (2.7 W) ^f | - | LIU85C (322 m ^l) |
| | | | | M850D3 (1400 mW) | M850LP1 (1400 mW Min) | | | | | |
| 870 nm | LED870E (22 mW) | - | - | - | - | - | - | - | - | - |
| | | | | | | | | | | |

| Light Emitting Diode (LED) Selection Guide | | | | | | | | | | |
|--|----------------------------------|-----------------|----------------------|--------------------------------------|--------------------------------------|---|----------------------------------|------------------------------------|--|-----------|
| Wavelength | Unmounted LEDs | Pigttailed LEDs | LEDs in SMT Packages | PCB-Mounted LEDs | Heatsink-Mounted LEDs | Collimated LEDs for Microscopy ^a | Fiber-Coupled LEDs ^b | High-Power LEDs for Microscopy | Multi-Wavelength LED Source Options ^c | LED Array |
| | LED870L (24 mW) | | | | | | | | | |
| 880 nm | - | - | - | M880D2 (300 mW Min) | M880L3 (300 mW Min) | - | M880F2 (3.4 mW) | - | - | - |
| 890 nm | LED890L (12 mW) | - | - | - | - | - | - | - | - | - |
| 910 nm | LED910L (10 mW) | - | - | - | - | - | - | - | - | - |
| | LED910E (12 mW) | | | | | | | | | |
| 930 nm | LED930L (15 mW) | - | - | - | - | - | - | - | - | - |
| 940 nm | LED940E (18 mW) | - | - | M940D2 (800 mW Min) | M940L3 (800 mW Min) | M940L3-Cx (320 mW) ^e | M940F3 (14.2 mW) | SOLIS-940C (2.5 W) ^f | - | - |
| 970 nm | LED970L (5 mW) | - | - | M970D3 (600 mW Min) | M970L4 (600 mW Min) | - | M970F3 (8.1 mW) | - | - | - |
| Single Color LEDs | | | | | | | | | | |
| 1050 nm | LED1050E (2.5 mW) | - | - | M1050D1 (50 mW Min) | M1050L2 (50 mW Min) | - | - | - | - | - |
| | LED1050L (4 mW) | | | M1050D3 (160 mW Min) | M1050L4 (160 mW Min) | | M1050F3 (3 mW) | | | |
| | LED1050L2 (8 mW) ^d | | | - | - | | - | | | |
| 1070 nm | LED1070L (4 mW) | - | - | - | - | - | - | - | - | - |
| | LED1070E (7.5 mW) | | | | | | | | | |
| 1085 nm | LED1085L (5 mW) | - | - | - | - | - | - | - | - | - |
| 1100 nm | - | - | - | M1100D1 (168 mW Min) ^d | M1100L1 (168 mW Min) ^d | - | M1100F1 (5.4 mW) ^d | - | - | - |
| 1200 nm | LED1200E (2.5 mW) | - | - | M1200D2 (30 mW Min) | M1200L3 (30 mW Min) | - | - | - | - | - |
| | LED1200L (5 mW) | | | | | | | | | |
| 1300 nm | LED1300E (2 mW) | - | - | M1300D2 (25 mW Min) | M1300L3 (25 mW Min) | - | - | - | - | - |
| | LED1300L (3.5 mW) | | | | | | | | | |
| 1450 nm | LED1450E (2 mW) | - | - | M1450D2 (31 mW Min) | M1450L3 (31 mW Min) | - | - | - | - | - |
| | LED1450L (5 mW) | | | | | | | | | |
| 1550 nm | LED1550E (2 mW) | - | - | M1550D2 (31 mW Min) | M1550L3 (31 mW Min) | - | - | - | - | - |
| | LED1550L (4 mW) | | | | | | | | | |
| 1600 nm | LED1600L (2 mW) | - | - | - | - | - | - | - | - | - |
| 1650 nm | LED1600P (1.2 mW) | - | - | M1650D2 (13 mW Min) | M1650L4 (13 mW Min) | - | - | - | - | - |

Light Emitting Diode (LED) Selection Guide

| | | | | | | | | | | |
|---|--|-----------------------|-----------------------------|-------------------------|------------------------------|---|---------------------------------------|---------------------------------------|--|------------------|
| 1750 nm | LED1700P (1.2 mW Quasi-CW, 30 mW Pulsed) | - | - | - | - | - | - | - | - | - |
| 1850 nm | LED1800P (0.9 mW Quasi-CW, 20 mW Pulsed) | - | - | - | - | - | - | - | - | - |
| 1950 nm | LED1900P (1.0 mW Quasi-CW, 25 mW Pulsed) | - | - | - | - | - | - | - | - | - |
| 2050 nm | LED2050P (1.1 mW Quasi-CW, 28 mW Pulsed) | - | - | - | - | - | - | - | - | - |
| 2350 nm | LED2350P (0.8 mW Quasi-CW, 16 mW Pulsed) | - | - | - | - | - | - | - | - | - |
| 2700 nm | LED2700W (0.15 mW Quasi-CW, 1.0 mW Pulsed) | - | - | - | - | - | - | - | - | - |
| 2800 nm | LED2800W (0.3 mW Quasi-CW, 2.0 mW Pulsed) | - | - | - | - | - | - | - | - | - |
| 3400 nm | LED3400W (0.3 mW Quasi-CW, 2.0 mW Pulsed) | - | - | - | - | - | - | - | - | - |
| 3800 nm | LED3800W (0.18 mW Quasi-CW, 1.5 mW Pulsed) | - | - | - | - | - | - | - | - | - |
| 4200 nm | LED4300P (0.03 mW Quasi-CW, 0.2 mW Pulsed) | - | - | - | - | - | - | - | - | - |
| 4300 nm | LED4300W (0.18 mW Quasi-CW, 1.5 mW Pulsed) | - | - | - | - | - | - | - | - | - |
| 4500 nm | LED4600P (0.006 mW Quasi-CW, 0.12 mW Pulsed) | - | - | - | - | - | - | - | - | - |
| Wavelength | Unmounted LEDs | Pigtailed LEDs | LEDs in SMT Packages | PCB-Mounted LEDs | Heatsink-Mounted LEDs | Collimated LEDs for Microscopy^a | Fiber-Coupled LEDs^b | High-Power LEDs for Microscopy | Multi-Wavelength LED Source Options^c | LED Array |
| Multi-Color, Broadband, and White LEDs | | | | | | | | | | |
| 455 nm (12.5% ⁱ) and 640 nm | - | - | - | MPRP1D2 (275 mW Min) | MPRP1L4 (275 mW Min) | - | - | - | - | - |















Light Emitting Diode (LED) Selection Guide

| | | | | | | | | | | |
|--------------------------------------|---|---|---------------------|-------------------------------------|--------------------------------------|------------------------------------|---------------------|----------------------------------|---|-------------------|
| 572 nm and 625 nm | LEDGR (0.09 mW and 0.19 mW) | - | - | - | - | - | - | - | - | - |
| 588 nm and 617 nm | LEDRY (0.09 mW and 0.19 mW) | - | - | - | - | - | - | - | - | - |
| 467.5 nm, 525 nm, and 627.5 nm | LEDRGBE (5.8 mW, 6.2 mW, and 3.1 mW) | - | - | - | - | - | - | - | - | - |
| 430 - 660 nm (White) | LEDWE-15 (13 mW) | - | - | - | - | - | - | - | - | - |
| | LEDW7E (15.0 mW) | - | - | - | - | - | - | - | - | - |
| | LEDW25E (15.0 mW) | - | - | - | - | - | - | - | - | - |
| 6500 K (Cold White) | - | - | - | MCWHD5 (930 mW Min) | MCWHL7 (930 mW Min) | MCWHL5-Cx (340 mW) ^h | - | SOLIS-1D (5.8 W) ^f | - | - |
| | - | - | - | MCWHD6 (942 mW Min) ^d | MCWHL2 (942 mW Min) ^d | MCWHL6-Cx (354 mW) ^e | - | - | - | - |
| 6200 K (Cold White) | - | - | - | - | - | - | MCWHF2 (27.0 mW) | - | - | - |
| 5000 K (Cold White) | - | - | LEDSW50 (110 mW) | - | - | - | - | - | - | - |
| 4600 - 9000 K (Cold White) | - | - | - | - | - | - | - | - | - | LIUCWI (250 m) |
| 4000 K (Warm White) | - | - | LEDSW40 (115 mW) | - | - | - | MWWHF2 (23.1 mW) | - | - | - |
| 3000 K (Warm White) | - | - | LEDSW30 (100 mW) | MWWHD3 (2000 mW Min) | MWWHL4 (570 mW Min) | - | - | SOLIS-2C (3.2 W) ^f | - | - |
| | - | - | - | - | MWWHL1 (2000 mW Min) | - | - | - | - | - |
| 5700 K (Day Light White) | - | - | - | - | - | - | - | SOLIS-3C (3.5 W) | - | - |
| 470 - 850 nm (Broadband) | - | - | - | MBB1D1 (70 mW Min) | MBB1L3 (70 mW Min) | - | MBB1F1 (1.2 mW) | - | - | - |
| 770 nm, 860 nm, & 940 nm (Broadband) | - | - | - | MBB2D1 (740 mW Min) ^d | MBB2L1 (650 mW Min) ^d | - | - | - | - | - |
| | - | - | - | | MBB2LP1 (740 mW Min) ^d | - | - | - | - | - |

- a. These Collimated LEDs are compatible with the standard and epi-illumination ports on the following microscopes: Olympus BX/IX (Item # Suffix: -C1), Leica DMI (Item # Suffix: -C2), Zeiss Axioskop (Item # Suffix: -C4), and Nikon Eclipse (Bayonet Mount, Item # Suffix: -C5).
- b. Typical power when used with MM Fiber with Ø400 µm core, 0.39 NA.
- c. Our Multi-Wavelength LED Sources are available with select combinations of the LEDs at these wavelengths.
- d. Measured at 25 °C
- e. Typical power for LEDs with the Leica DMI collimation package (Item # Suffix: -C2).
- f. Minimum power for the collimated output of these LEDs. The collimation lens is installed with each LED.
- g. Typical power for LEDs with the Olympus BX and IX collimation package (Item # Suffix: -C1).
- h. Typical power for LEDs with the Nikon Eclipse collimation package (Item # Suffix: -C5).
- i. Percentage of LED intensity that emits in the blue portion of the spectrum, from 400 nm to 525 nm.
- j. Typical power for LEDs with the Zeiss Axioskop collimation package (Item # Suffix: -C4).

Deep UV Mounted LEDs (265 - 340 nm)

Please note that our deep UV LEDs radiate intense UV light during operation. Precautions must be taken to prevent looking directly at the UV light, and UV light protective glasses must be worn to avoid eye damage. Exposure of the skin and other body parts to UV light should be avoided.























| Item # | Info ^a | Nominal Wavelength ^b | Housing Type ^c | LED Output Power (Min / Typ.) ^{b,d} | Bandwidth (FWHM) | Irradiance ^e | Max Current (CW) | Forward Voltage (Typ.) | Viewing Angle (Full Angle at Half Max) | Recommended Driver |
|--------|---|---------------------------------|---|--|--------------------|---|---------------------|------------------------|--|--|
| M265L4 |  | 265 nm |  | 24 mW / 35 mW | 6.8 nm | 0.47 $\mu\text{W}/\text{mm}^2$ | 350 mA | 6.0 V | 120° | DC2200 or LEDD1B |
| M275L4 |  | 275 nm |  | 45 mW / 80 mW | 11 nm | 0.8 $\mu\text{W}/\text{mm}^2$ | 700 mA | 7.3 V | 118° | |
| M280L6 |  | 280 nm |  | 78 mW ^f / 114 mW ^f | 10 nm ^f | 1 $\mu\text{W}/\text{mm}^2$ | 500 mA ^f | 6.26 V ^f | 114° ^{f,g} | |
| M300L4 |  | 300 nm |  | 26 mW / 32 mW | 20 nm | 0.3 $\mu\text{W}/\text{mm}^2$ | 350 mA | 8.0 V | 130° | |
| M310L1 |  | 308 nm |  | 38.5 mW / 56.5 mW ^f | 30 nm ^f | 0.76 $\mu\text{W}/\text{mm}^2$ ^f | 600 mA ^f | 5 V ^f | 120° ^{f,g} | |
| M325L5 |  | 325 nm |  | 25 mW / 35 mW | 12 nm | 0.44 $\mu\text{W}/\text{mm}^2$ (Max) | 600 mA | 5.2 V | 120° | DC2200, LEDD1B, DC4100 ^h , or DC4104 ^h |
| M340L4 |  | 340 nm |  | 53 mW / 60 mW | 11 nm | 2.22 $\mu\text{W}/\text{mm}^2$ | 700 mA | 4.6 V | 110° | |

- Click on the blue info icon for complete specifications and LED spectrum.
- Due to variations in the manufacturing process and operating parameters such as temperature and current, the actual spectral output of any given LED will vary. Output plots and nominal wavelength specs are only intended to be used as a guideline.
- Click for LED Product Photo
- When Driven at the Max Current
- Irradiance is measured at a distance of 200 mm from the LED. Typical value unless otherwise noted
- Measured at 25 °C.
- When Driven at a Current of 350 mA
- This is a four-channel driver and requires the DC4100-HUB connector hub to drive mounted LEDs.

| Part Number | Description | Price | Availability |
|-------------|--|----------|--------------|
| M265L4 | 265 nm, 24 mW (Min) Mounted LED, 350 mA | \$950.00 | 7-10 Days |
| M275L4 | 275 nm, 45 mW (Min) Mounted LED, 700 mA | \$380.60 | Today |
| M280L6 | 280 nm, 78 mW (Min) Mounted LED, 500 mA | \$403.96 | 7-10 Days |
| M300L4 | 300 nm, 26 mW (Min) Mounted LED, 350 mA | \$510.22 | Today |
| M310L1 | 308 nm, 38.5 mW (Min), Mounted LED, 600 mA | \$576.15 | 7-10 Days |
| M325L5 | 325 nm, 25 mW (Min) Mounted LED, 600 mA | \$666.25 | Today |
| M340L4 | 340 nm, 53 mW (Min) Mounted LED, 700 mA | \$320.55 | Today |

UV Mounted LEDs (365 - 405 nm)

Please note that our UV LEDs radiate intense UV light during operation. Precautions must be taken to prevent looking directly at the UV light, and UV light protective glasses must be worn to avoid eye damage. Exposure of the skin and other body parts to the UV light should be avoided.























| Item # | Info ^a | Nominal Wavelength ^b | Housing Type ^c | LED Output Power (Min / Typ.) ^{b,d} | Bandwidth (FWHM) | Irradiance (Typ.) ^e | Max Current (CW) | Forward Voltage (Typ.) | Viewing Angle (Full Angle at Half Max) | Recommended Driver |
|---------|---|---------------------------------|---|--|------------------|---------------------------------|------------------|------------------------|--|---|
| M365L3 |  | 365 nm |  | 880 mW / 1290 mW | 9 nm | 14.4 $\mu\text{W}/\text{mm}^2$ | 1000 mA | 3.85 V | 120° | UPLED, DC2200, LEDD1B, DC4100 ^f , or DC4104 ^f |
| M365LP1 |  | 365 nm |  | 1350 mW / 2000 mW | 9 nm | 21.0 $\mu\text{W}/\text{mm}^2$ | 1700 mA | 4.0 V | 120° | DC2200 |
| M375L4 |  | 375 nm |  | 1270 mW / 1540 mW | 9 nm | 19.2 $\mu\text{W}/\text{mm}^2$ | 1400 mA | 3.6 V | 130° | |
| M385L2 |  | 385 nm |  | 270 mW / 430 mW | 10 nm | 11.8 $\mu\text{W}/\text{mm}^2$ | 700 mA | 4.3 V | 120° | UPLED, DC2200, LEDD1B, DC4100 ^f , or DC4104 ^f |
| M385L3 |  | 385 nm |  | 1240 mW / 1780 mW | 11 nm | 19.9 $\mu\text{W}/\text{mm}^2$ | 1000 mA | 3.7 V | 120° | |
| M385LP1 |  | 385 nm |  | 1650 mW / 1830 mW | 12 nm | 23.3 $\mu\text{W}/\text{mm}^2$ | 1700 mA | 3.9 V | 120° | DC2200 |
| M395L4 |  | 395 nm |  | 400 mW / 535 mW | 16 nm | 6.7 $\mu\text{W}/\text{mm}^2$ | 500 mA | 4.5 V | 126° | UPLED, DC2200, LEDD1B, DC4100 ^f , or DC4104 ^f |
| M395L5 |  | 395 nm |  | 1130 mW / 1630 mW | 11 nm | 16.9 $\mu\text{W}/\text{mm}^2$ | 1000 mA | 3.7 V | 120° | |
| M395LP1 |  | 395 nm |  | 1420 mW / 2050 mW | 11 nm | 22.8 $\mu\text{W}/\text{mm}^2$ | 1400 mA | 4.0 V | 120° | DC2200 |
| M405L4 |  | 405 nm |  | 1000 mW / 1300 mW | 12.5 nm | 14.53 $\mu\text{W}/\text{mm}^2$ | 1000 mA | 3.4 V | 140° | UPLED, DC2200, LEDD1B, DC4100 ^f , or DC4104 ^f |
| M405LP1 |  | 405 nm |  | 1200 mW / 1700 mW | 12 nm | 24.6 $\mu\text{W}/\text{mm}^2$ | 1400 mA | 3.45 V | 120° | |

- Click on the blue info icon for complete specifications and LED spectrum.
- Due to variations in the manufacturing process and operating parameters such as temperature and current, the actual spectral output of any given LED will vary. Output plots and nominal wavelength specs are only intended to be used as a guideline.
- Click for LED Product Photo
- When Driven at the Max Current\
- Irradiance is measured at a distance of 200 mm from the LED.
- This is a four-channel driver and requires the DC4100-HUB connector hub to drive mounted LEDs.

| Part Number | Description | Price | Availability |
|-------------|--|----------|--------------|
| M365L3 | 365 nm, 880 mW (Min) Mounted LED, 1000 mA | \$389.50 | Today |
| M365LP1 | 365 nm, 1350 mW (Min) Mounted LED, 1700 mA | \$472.51 | Today |
| M375L4 | 375 nm, 1270 mW (Min) Mounted LED, 1400 mA | \$184.86 | Today |
| M385L2 | 385 nm, 270 mW (Min) Mounted LED, 700 mA | \$287.00 | 7-10 Days |
| M385L3 | 385 nm, 1240 mW (Min) Mounted LED, 1000 mA | \$389.50 | Today |
| M385LP1 | 385 nm, 1650 mW (Min) Mounted LED, 1700 mA | \$472.51 | Today |
| M395L4 | 395 nm, 400 mW (Min) Mounted LED, 500 mA | \$287.00 | Today |
| M395L5 | 395 nm, 1130 mW (Min) Mounted LED, 1000 mA | \$389.50 | Today |
| M395LP1 | 395 nm, 1420 mW (Min) Mounted LED, 1400 mA | \$472.51 | Today |
| M405L4 | 405 nm, 1000 mW (Min) Mounted LED, 1000 mA | \$239.24 | Today |
| M405LP1 | 405 nm, 1200 mW (Min) Mounted LED, 1400 mA | \$472.51 | Today |

Single-Color Cold Visible Mounted LEDs (415 - 565 nm)

Please note that the 415 nm (violet) LEDs radiate intense UV light during operation. Precautions must be taken to prevent looking directly at the UV light, and UV light protective glasses must be worn to avoid eye damage. Exposure of the skin and other body parts to the UV light should be avoided.

















| Item # | Info ^a | Nominal Wavelength ^{b,c} | Housing Type ^d | LED Output Power (Min / Typ.) ^{b,e} | Bandwidth (FWHM) | Irradiance (Typ.) ^f | Max Current (CW) | Forward Voltage ^g | Viewing Angle (Full Angle at Half Max) | Recommended Driver |
|----------------------|---|-----------------------------------|---|--|------------------|--------------------------------|------------------|------------------------------|--|--|
| M415L4 ^h |  | 415 nm (Violet) |  | 1310 mW / 1550 mW | 14 nm | 15.6 $\mu\text{W}/\text{mm}^2$ | 1500 mA | 3.1 V | 138° | DC2200 |
| M415LP1 ^h |  | 415 nm (Violet) |  | 1640 mW / 1940 mW | 14 nm | 19.5 $\mu\text{W}/\text{mm}^2$ | 2000 mA | 3.15 V | 138° | |
| M430L5 |  | 430 nm (Violet) |  | 529.2 mW / 757.6 mW | 17 nm | 25.7 $\mu\text{W}/\text{mm}^2$ | 500 mA | 3.66 V | 126° | UPLD, DC2200, LEDD1B, DC4100 ⁱ , or DC4104 ⁱ |
| M450LP1 |  | 450 nm (Royal Blue) |  | 1850 mW / 2100 mW | 18 nm | 35.6 $\mu\text{W}/\text{mm}^2$ | 2000 mA | 3.5 V | 120° | DC2200 |
| M455L4 |  | 455 nm (Royal Blue) |  | 1150 mW / 1445 mW | 18 nm | 32 $\mu\text{W}/\text{mm}^2$ | 1000 mA | 3.25 V | 80° | UPLD, DC2200, LEDD1B, DC4100 ⁱ , or DC4104 ⁱ |
| M470L5 |  | 470 nm (Blue) |  | 809 mW / 1161.7 mW | 28 nm | 21.4 $\mu\text{W}/\text{mm}^2$ | 1000 mA | 3.8 V | 80° | |
| M490L4 |  | 490 nm (Blue) |  | 205 mW / 240 mW | 26 nm | 2.5 $\mu\text{W}/\text{mm}^2$ | 350 mA | 3.8 V | 128° | |
| M505L4 |  | 505 nm (Cyan) |  | 400 mW / 520 mW | 37 nm | 5.94 $\mu\text{W}/\text{mm}^2$ | 1000 mA | 3.5 V | 130° | |
| M530L4 |  | 530 nm (Green) |  | 370 mW / 480 mW | 35 nm | 9.46 $\mu\text{W}/\text{mm}^2$ | 1000 mA | 3.6 V | 80° | |
| MINTL5 |  | 554 nm (Mint) |  | 650 mW / 815 mW | - | 12.4 $\mu\text{W}/\text{mm}^2$ | 1225 mA | 3.5 V | 120° | DC2200 or LEDD1B ^j |
| M565L3 ^k |  | 565 nm (Lime) |  | 880 mW / 979 mW | 104 nm | 11.7 $\mu\text{W}/\text{mm}^2$ | 1000 mA | 3.1 V (Max) | 125° | UPLD, DC2200, LEDD1B, DC4100 ⁱ , or DC4104 ⁱ |

- Click on the blue info icon for complete specifications and LED spectrum.
- Due to variations in the manufacturing process and operating parameters such as temperature and current, the actual spectral output of any given LED will vary. Output plots and nominal wavelength specs are only intended to be used as a guideline.
- The nominal wavelength indicates the wavelength at which the LED appears brightest to the human eye. The nominal wavelength for visible LEDs may not correspond to the peak wavelength as measured by a spectrometer.
- Click for LED Product Photo
- When Driven at the Max Current
- Irradiance is measured at a distance of 200 mm from the LED.
- Values are typical unless otherwise stated.
- This LED radiates intense UV light during operation. Precautions must be taken to prevent looking directly at the UV light and UV light protective glasses must be worn to avoid eye damage. Exposure of the skin and other body parts to the UV light should be avoided.
- This is a four-channel driver and requires the DC4100-HUB connector hub to drive mounted LEDs.
- Due to the maximum current that can be provided by this driver, while this mounted LED can be driven, it will not reach full power.]
- This LED is phosphor-converted and may not turn off completely when modulated above 10 kHz at duty cycles below 50%.

| Part Number | Description | Price | Availability |
|-------------|--|----------|--------------|
| M415L4 | 415 nm, 1310 mW (Min) Mounted LED, 1500 mA | \$217.48 | Today |
| M415LP1 | 415 nm, 1640 mW (Min) Mounted LED, 2000 mA | \$326.23 | Today |
| M430L5 | 430 nm, 529.2 mW (Min) Mounted LED, 500 mA | \$201.98 | Today |
| M450LP1 | 450 nm, 1850 mW (Min) Mounted LED, 2000 mA | \$333.86 | Today |
| M455L4 | 455 nm, 1150 mW (Min) Mounted LED, 1000 mA | \$303.91 | Today |
| M470L5 | NEW! 470 nm, 809 mW (Min) Mounted LED, 1000 mA | \$227.92 | Lead Time |

| | | | |
|--------|--|----------|-----------|
| M490L4 | 490 nm, 205 mW (Min) Mounted LED, 350 mA | \$211.85 | Today |
| M505L4 | 505 nm, 520 mW (Typ.) Mounted LED, 1000 mA | \$303.91 | 7-10 Days |
| M530L4 | 530 nm, 370 mW (Min) Mounted LED, 1000 mA | \$303.91 | Today |
| MINTL5 | 554 nm, 650 mW (Min) Mounted LED, 1225 mA | \$290.33 | 7-10 Days |
| M565L3 | 565 nm, 880 mW (Min) Mounted LED, 1000 mA | \$239.58 | Today |



































Single-Color Warm Visible Mounted LEDs (590 - 730 nm)

| Item # | Info ^a | Nominal Wavelength ^{b,c} | Housing Type ^d | LED Output Power (Min / Typ.) ^{b,e} | Bandwidth (FWHM) | Irradiance (Typ.) ^f | Max Current (CW) | Forward Voltage (Typ.) | Viewing Angle (Full Angle at Half Max) | Recommended Driver |
|---------------------|---|-----------------------------------|---|--|------------------|---------------------------------|------------------|------------------------|--|--|
| M590L4 |  | 590 nm (Amber) |  | 230 mW / 300 mW | 15 nm | 6.0 $\mu\text{W}/\text{mm}^2$ | 1000 mA | 2.5 V | 80° | UPLD, DC2200, LEDD1B, DC4100 ^h , or DC4104 ^h |
| M595L4 ^g |  | 595 nm (Amber) |  | 820 mW / 1217 mW | 64 nm | 13.5 $\mu\text{W}/\text{mm}^2$ | 1500 mA | 3.0 V | 120° | DC2200 |
| M617L3 |  | 617 nm (Orange) |  | 600 mW / 650 mW | 18 nm | 15.7 $\mu\text{W}/\text{mm}^2$ | 1000 mA | 2.2 V | 80° | UPLD, DC2200, LEDD1B, DC4100 ^h , or DC4104 ^h |
| M625L4 |  | 625 nm (Red) |  | 700 mW / 920 mW | 17 nm | 21.9 $\mu\text{W}/\text{mm}^2$ | 1000 mA | 2.5 V | 80° | |
| M660L4 |  | 660 nm (Deep Red) |  | 940 mW / 1050 mW | 20 nm | 20.88 $\mu\text{W}/\text{mm}^2$ | 1200 mA | 2.6 V | 120° | UPLD, DC2200 or LEDD1B |
| M680L4 |  | 680 nm (Deep Red) |  | 180 mW / 210 mW | 22 nm | 14.5 $\mu\text{W}/\text{mm}^2$ | 600 mA | 2.5 V | 18° | UPLD, DC2200, LEDD1B, DC4100 ^h , or DC4104 ^h |
| M700L4 |  | 700 nm (Deep Red) |  | 80 mW / 125 mW | 20 nm | 1.0 $\mu\text{W}/\text{mm}^2$ | 500 mA | 2.7 V | 128° | |
| M730L5 |  | 730 nm (Far Red) |  | 540 mW / 680 mW | 40 nm | 13.1 $\mu\text{W}/\text{mm}^2$ | 1000 mA | 2.25 V | 80° | |

- Click on the blue info icon for complete specifications and LED spectrum.
- Due to variations in the manufacturing process and operating parameters such as temperature and current, the actual spectral output of any given LED will vary. Output plots and nominal wavelength specs are only intended to be used as a guideline.
- The nominal wavelength indicates the wavelength at which the LED appears brightest to the human eye. The nominal wavelength for visible LEDs may not correspond to the peak wavelength as measured by a spectrometer.
- Click for LED Product Photo
- When Driven at the Max Current
- Irradiance is measured at a distance of 200 mm from the LED.
- This LED is phosphor-converted and may not turn off completely when modulated above 10 kHz at duty cycles below 50%.
- This is a four-channel driver and requires the DC4100-HUB connector hub to drive mounted LEDs.

| Part Number | Description | Price | Availability |
|-------------|---|----------|--------------|
| M590L4 | 590 nm, 230 mW (Min) Mounted LED, 1000 mA | \$221.71 | Today |
| M595L4 | 595 nm, 820 mW (Min) Mounted LED, 1500 mA | \$256.25 | Today |
| M617L3 | 617 nm, 600 mW (Min) Mounted LED, 1000 mA | \$168.92 | Today |
| M625L4 | 625 nm, 700 mW (Min) Mounted LED, 1000 mA | \$221.71 | 7-10 Days |
| M660L4 | 660 nm, 940 mW (Min) Mounted LED, 1200 mA | \$239.58 | Lead Time |
| M680L4 | Customer Inspired! 680 nm, 180 mW (Min) Mounted LED, 600 mA | \$215.18 | Today |
| M700L4 | 700 nm, 80 mW (Min) Mounted LED, 500 mA | \$215.18 | Today |
| M730L5 | 730 nm, 540 mW (Min) Mounted LED, 1000 mA | \$226.99 | Today |

IR Mounted LEDs (780 - 1650 nm)

| Item # | Info ^a | Nominal Wavelength ^b | Housing Type ^c | LED Output Power (Min / Typ.) ^{b,d} | Bandwidth (FWHM) | Irradiance (Typ.) ^e | Max Current (CW) | Forward Voltage (Typ.) | Viewing Angle (Full Angle at Half Max) | Recommended Driver |
|---------|---|---------------------------------|---|--|--------------------|---|----------------------|------------------------|--|---|
| M780L3 |  | 780 nm |  | 200 mW / 300 mW | 28 nm | 47.3 $\mu\text{W}/\text{mm}^2$ | 800 mA | 2.0 V | 20° | UPLED, DC2200, LEDD1B, DC4100 ^f , or DC4104 ^f |
| M780LP1 |  | 780 nm |  | 800 mW / 950 mW | 30 nm | 13.3 $\mu\text{W}/\text{mm}^2$ | 800 mA | 6.6 V | 120° | UPLED, DC2200 or LEDD1B |
| M810L3 |  | 810 nm |  | 325 mW / 375 mW | 25 nm | 61.8 $\mu\text{W}/\text{mm}^2$ | 500 mA | 3.6 V | 20° | UPLED, DC2200, LEDD1B, DC4100 ^f , or DC4104 ^f |
| M810L4 |  | 810 nm |  | 363 mW / 542 mW | 32 nm | 23.7 $\mu\text{W}/\text{mm}^2$ | 1000 mA | 3.55 V | 80° | |
| M850L3 |  | 850 nm |  | 900 mW / 1100 mW | 30 nm | 22.9 $\mu\text{W}/\text{mm}^2$ | 1200 mA | 2.95 V | 90° | UPLED, DC2200, or LEDD1B |
| M850LP1 |  | 850 nm |  | 1400 mW / 1600 mW | 30 nm | 19.4 $\mu\text{W}/\text{mm}^2$ | 1500 mA | 3.85 V | 150° | DC2200 |
| M880L3 |  | 880 nm |  | 300 mW / 350 mW | 50 nm | 5.6 $\mu\text{W}/\text{mm}^2$ | 1000 mA | 1.7 V | 132° | UPLED, DC2200, LEDD1B, DC4100 ^f , or DC4104 ^f |
| M940L3 |  | 940 nm |  | 800 mW / 1000 mW | 37 nm | 19.1 $\mu\text{W}/\text{mm}^2$ | 1000 mA | 2.75 V | 90° | |
| M970L4 |  | 970 nm |  | 600 mW / 720 mW | 60 nm | 7.4 $\mu\text{W}/\text{mm}^2$ | 1000 mA | 1.9 V | 130° | |
| M1050L2 |  | 1050 nm |  | 50 mW / 70 mW | 60 nm | 1.9 $\mu\text{W}/\text{mm}^2$ | 700 mA | 1.5 V | 120° | |
| M1050L4 |  | 1050 nm |  | 160 mW / 210 mW | 37 nm | 3.7 $\mu\text{W}/\text{mm}^2$ | 600 mA | 1.4 V | 128° | |
| M1100L1 |  | 1100 nm |  | 168 mW / 252 mW ^g | 50 nm ^g | 18.1 $\mu\text{W}/\text{mm}^2$ ^{d,g} | 1000 mA ^g | 1.4 V ^{d,g} | 18° ^{g,h} | |
| M1200L3 |  | 1200 nm |  | 30 mW / 35 mW | 80 nm | 0.7 $\mu\text{W}/\text{mm}^2$ | 700 mA | 1.4 V | 134° | |
| M1300L3 |  | 1300 nm |  | 25 mW / 30 mW | 80 nm | 0.6 $\mu\text{W}/\text{mm}^2$ | 500 mA | 1.4 V | 134° | |
| M1450L3 |  | 1450 nm |  | 31 mW / 36 mW | 80 nm | 0.4 $\mu\text{W}/\text{mm}^2$ | 700 mA | 1.15 V | 136° | |
| M1550L3 |  | 1550 nm |  | 31 mW / 36 mW | 102 nm | 0.5 $\mu\text{W}/\text{mm}^2$ | 1000 mA | 1.35 V | 136° | |
| M1650L4 |  | 1650 nm |  | 13 mW / 16 mW | 120 nm | 1.2 $\mu\text{W}/\text{mm}^2$ | 600 mA | 1.1 V | 20° | |



- Click on the blue info icon for complete specifications and LED spectrum.
- Due to variations in the manufacturing process and operating parameters such as temperature and current, the actual spectral output of any given LED will vary. Output plots and nominal wavelength specs are only intended to be used as a guideline.
- Click for LED Product Photo
- When Driven at the Max Current
- Irradiance is measured at a distance of 200 mm from the LED.
- This is a four-channel driver and requires the DC4100-HUB connector hub to drive mounted LEDs.
- Measured at 25 °C
- When Driven at a Current of 100 mA

| Part Number | Description | Price | Availability |
|-------------|---|----------|--------------|
| M780L3 | 780 nm, 200 mW (Min) Mounted LED, 800 mA | \$239.58 | Today |
| M780LP1 | 780 nm, 800 mW (Min) Mounted LED, 800 mA | \$362.71 | Today |
| M810L3 | 810 nm, 325 mW (Min) Mounted LED, 500 mA | \$222.95 | 7-10 Days |
| M810L4 | 810 nm, 363 mW (Min) Mounted LED, 1000 mA | \$261.38 | Today |
| M850L3 | 850 nm, 900 mW (Min) Mounted LED, 1200 mA | \$239.58 | Today |
| M850LP1 | 850 nm, 1400 mW (Min) Mounted LED, 1500 mA | \$379.34 | Today |
| M880L3 | 880 nm, 300 mW (Min) Mounted LED, 1000 mA | \$239.58 | Today |
| M940L3 | 940 nm, 800 mW (Min) Mounted LED, 1000 mA | \$239.58 | Today |
| M970L4 | 970 nm, 600 mW (Min) Mounted LED, 1000 mA | \$184.86 | Today |
| M1050L2 | Customer Inspired! 1050 nm, 50 mW (Min) Mounted LED, 700 mA | \$257.33 | Today |
| M1050L4 | 1050 nm, 160 mW (Min) Mounted LED, 600 mA | \$313.18 | Today |
| M1100L1 | 1100 nm, 168 mW (Min) Mounted LED, 1000 mA | \$330.51 | Today |
| M1200L3 | Customer Inspired! 1200 nm, 30 mW (Min) Mounted LED, 700 mA | \$319.44 | Today |

| | | | |
|---------|--|----------|-----------|
| M1300L3 | Customer Inspired! 1300 nm, 25 mW (Min) Mounted LED, 500 mA | \$319.44 | Today |
| M1450L3 | 1450 nm, 31 mW (Min) Mounted LED, 700 mA | \$204.95 | Lead Time |
| M1550L3 | Customer Inspired! 1550 nm, 31 mW (Min) Mounted LED, 1000 mA | \$319.44 | Today |
| M1650L4 | 1650 nm, 13 mW (Min) Mounted LED, 600 mA | \$318.61 | Today |

Purple Mounted LED (455 nm / 640 nm)

Our dual-peak LED was designed for applications requiring illumination in both red and blue portions of the spectrum, such as horticulture. This purple LED features dual peaks at 455 nm and 640 nm, respectively, to stimulate photosynthesis (see graph to compare the absorption peaks of photosynthesis pigments with the LED spectrum). The LED was designed to maintain the red/blue ratio of the emission spectrum over its lifetime to provide high uniformity of plant growth.













| Item # | Info ^a | Nominal Wavelength ^b | Housing Type ^c | LED Output Power (Min / Typ.) ^{b,d} | Bandwidth (FWHM) | Irradiance (Typ.) ^e | Max Current (CW) | Forward Voltage (Typ.) | Viewing Angle (Full Angle at Half Max) | Recommended Driver |
|----------------------|---|---|---|--|------------------|----------------------------------|------------------|------------------------|--|--|
| MPRP1L4 ^f |  | 455 nm (12.5% ^g) / 640 nm |  | 275 mW / 325 mW | N/A | 3.7 $\mu\text{W}/\text{mm}^2$ | 300 mA | 3.1 V | 115° | UPLD, DC2200, LEDD1B, DC4100 ^h , or DC4104 ^h |

- Click on the blue info icon for complete specifications and LED spectrum.
- Due to variations in the manufacturing process and operating parameters such as temperature and current, the actual spectral output of any given LED will vary. Output plots and nominal wavelength specs are only intended to be used as a guideline.
- Click for LED Product Photo
- When Driven at the Max Current
- Irradiance is measured at a distance of 200 mm from the LED.
- This LED is phosphor-converted and may not turn off completely when modulated above 10 kHz at duty cycles below 50%.
- Percentage of LED intensity that emits in the blue portion of the spectrum, from 400 nm to 525 nm. Click on the info icon for details.
- This is a four-channel driver and requires the DC4100-HUB connector hub to drive mounted LEDs.

| Part Number | Description | Price | Availability |
|-------------|---|----------|--------------|
| MPRP1L4 | 455 nm (12.5%) / 640 nm, 275 mW (Min) Mounted LED, 300 mA | \$163.12 | 7-10 Days |

White Mounted LEDs (400 - 700 nm Wavelength Range)

Our warm, neutral, and cold white LEDs feature broad spectra that span several hundred nanometers. The difference in appearance among these LEDs can be described using the correlated color temperature, which indicates that the LEDs color appearance is similar to a black body radiator at that temperature. In general, warm white LEDs offer a spectrum similar to a tungsten source, while cold white LEDs have a stronger blue component to the spectrum; neutral white LEDs provide a more even illumination spectrum over the visible range than warm white or cold white LEDs. Cold white LEDs are more suited for fluorescence microscopy applications or cameras with white balancing, because of a higher intensity at most wavelengths compared to warm white LEDs. Neutral white LEDs are ideal for horticultural applications.







| Item # | Info ^a | Correlated Color Temperature ^b | Housing Type ^c | LED Output Power (Min / Typ.) ^{b,d} | Bandwidth (FWHM) | Irradiance (Typ.) ^e | Max Current (CW) | Forward Voltage (Typ.) | Viewing Angle (Full Angle at Half Max) | Recommended Driver |
|----------------------|---|---|---|--|------------------|--------------------------------|------------------|------------------------|--|--|
| MWWHL4 ^f |  | 3000 K (Warm White) |  | 570 mW / 640 mW | N/A | 9.4 $\mu\text{W}/\text{mm}^2$ | 1000 mA | 3.0 V | 120° | UPLED, DC2200, LEDD1B, DC4100 ^g , or DC4104 ^g |
| MWWHLP1 ^f |  | 3000 K (Warm White) |  | 2000 mW / 2300 mW | N/A | 37.0 $\mu\text{W}/\text{mm}^2$ | 700 mA | 11.7 V | 125° | DC2200 or LEDD1B |
| MWUVL1 ^f |  | 4000 K ^h (Neutral White) |  | 235 mW / 338 mW | N/A | 4.0 $\mu\text{W}/\text{mm}^2$ | 125 mA | 6.3 V | 120° ⁱ | UPLED, DC2200, or LEDD1B |
| MNWHL4 ^f |  | 4900 K (Neutral White) |  | 740 mW / 880 mW | N/A | 7.7 $\mu\text{W}/\text{mm}^2$ | 1225 mA | 2.9 V | 150° | DC2200, LEDD1B ^j , DC4100 ^{g,j} , or DC4104 ^{g,j} |
| MCWHL7 ^f |  | 6500 K (Cold White) |  | 930 mW / 1370 mW | N/A | 25.9 $\mu\text{W}/\text{mm}^2$ | 1300 mA | 3.3 V | 80° | |
| MCWHLP2 ^f |  | 6500 K (Cold White) |  | 942 mW / 1353 mW | N/A | 11.8 $\mu\text{W}/\text{mm}^2$ | 1300 mA | 4.51 V | 150° | DC2200 |

- Click on the blue info icon for complete specifications and LED spectrum.
- Due to variations in the manufacturing process and operating parameters such as temperature and current, the actual spectral output of any given LED will vary. Output plots and correlated color temperature specs are only intended to be used as a guideline.
- Click for LED Product Photo
- When Driven at the Max Current
- Irradiance is measured at a distance of 200 mm from the LED.
- These LEDs are phosphor-converted and may not turn off completely when modulated above 10 kHz at duty cycles below 50%.
- This is a four-channel driver and requires the DC4100-HUB connector hub to drive mounted LEDs.
- Neutral White LED Spectrum with a Peak at 406 nm
- When Driven with a Pulsed Forward Current of 75 mA
- Due to the maximum current that can be provided by this driver, while this mounted LED can be driven, it will not reach full power.

| Part Number | Description | Price | Availability |
|-------------|---|----------|--------------|
| MWWHL4 | 3000 K, 570 mW (Min) Mounted LED, 1000 mA | \$187.45 | Today |
| MWWHLP1 | 3000 K, 2000 mW (Min) Mounted LED, 700 mA | \$339.40 | 7-10 Days |
| MWUVL1 | NEW! 4000 K, 235 mW (Min) Mounted LED, 125 mA | \$166.76 | Today |
| MNWHL4 | 4900 K, 740 mW (Min) Mounted LED, 1225 mA | \$163.12 | 7-10 Days |
| MCWHL7 | 6500 K, 930 mW (Min) Mounted LED, 1300 mA | \$220.45 | Lead Time |
| MCWHLP2 | 6500 K, 942 mW (Min), Mounted LED, 1300 mA | \$292.58 | Lead Time |

Broadband Mounted LEDs

The MBB1L3 broadband LED has a relatively flat spectral emission over a wide wavelength range. Its 10 dB bandwidth ranges between 470 nm and 850 nm. The MBB2L1 and MBB2LP1 broadband LEDs feature a spectrum with peaks at approximately 770 nm, 860 nm, and 940 nm.

| Item # | Info ^a | Wavelength ^b | Housing Type ^c | LED Output Power (Min / Typ.) ^{b,d} | Bandwidth (FWHM) | Irradiance (Typ.) ^e | Max Current (CW) | Forward Voltage (Typ.) | Viewing Angle (Full Angle at Half Max) | Recommended Driver |
|---------------------|---|---|---|--|------------------|---|----------------------|------------------------|--|---|
| MBB1L3 ^f |  | 470 - 850 nm (10 dB Bandwidth) |  | 70 mW | 280 nm | 0.9 $\mu\text{W}/\text{mm}^2$ | 500 mA | 3.6 V | 120° | UPLED, DC2200, LEDD1B, DC4100 ^g , or DC4104 ^g |
| MBB2L1 |  | 770 nm, 860 nm, & 940 nm (Peak Wavelengths) |  | 650 mW / 970 mW ^h | N/A | 11.9 $\mu\text{W}/\text{mm}^2$ ^{d,h} | 800 mA ^h | 4.8 V ^h | 120° ^h | |
| MBB2LP1 |  | |  | 740 mW / 1090 mW ^h | N/A | 13.5 $\mu\text{W}/\text{mm}^2$ ^{d,h} | 1000 mA ^h | 4.8 V ^h | 120° ^h | |

- Click on the blue info icon for complete specifications and LED spectrum.
- Due to variations in the manufacturing process and operating parameters such as temperature and current, the actual spectral output of any given LED will vary. Output plots and nominal wavelength specs are only intended to be used as a guideline.
- Click for LED Product Photo
- When Driven at the Max Current
- Irradiance is measured at a distance of 200 mm from the LED.
- The LED may not turn off completely when modulated at frequencies above 1 kHz with a duty cycle of 50%, as the broadband emission is produced by optically stimulating emission from phosphor. For modulation at frequencies above 1 kHz, the duty cycle may be reduced. For example, 10 kHz modulation is attainable with a duty cycle of 5%.
- This is a four-channel driver and requires the DC4100-HUB connector hub to drive mounted LEDs.
- Measured at 25 °C

| Part Number | Description | Price | Availability |
|-------------|---|----------|--------------|
| MBB1L3 | 470 - 850 nm Mounted Broadband LED, 70 mW (Min), 500 mA | \$559.02 | Today |
| MBB2L1 | IR Mounted Broadband LED (770 nm, 860 nm & 940 nm), 650 mW (Min), 800 mA | \$585.51 | Today |
| MBB2LP1 | IR Mounted Broadband LED (770 nm, 860 nm & 940 nm), 740 mW (Min), 1000 mA | \$684.48 | 7-10 Days |

Adjustable Collimation Adapters for Ø1" (Ø25 mm) or Ø2" (Ø50 mm) Optics



- ▶ Integrate a Ø1" (Ø25 mm) or Ø2" (Ø50 mm) Collimation Optic with Thorlabs' Mounted LEDs
- ▶ Adjust and Set Lens Position via Rotating Ring with Locking Setscrew
- ▶ Available with or without AR-Coated Lens (See Table Below for Details)
- ▶ Compatible with Thorlabs' SM2-Threaded Microscope Port Adapters



Click to Enlarge
SM2F Adapter Installed
on a
M365LP1 Mounted LED

These adapters allow Ø1" (Ø25 mm) or Ø2" (Ø50 mm) collimation optics to be integrated with the mounted LEDs sold above. The adapters can translate a Ø1" or Ø2" lens by up to 11 mm or 20 mm, respectively. They are offered in versions without a collimation optic or with a removable AR-coated aspheric condenser lens for 350 - 700 nm or 650 - 1050 nm. All of these adapters attach to the LED housing via external SM1 threads, allowing them to be used with both the Ø30.5 mm and Ø57.0 mm housings.

The collimation lens is mounted in an inner carriage that provides non-telescoping, rotating translation along the Z-axis by turning the knurled adjustment ring (engraved with the item # in the photos to the left) and is locked into position by turning the locking screw on the side of the adjustment ring with a 2 mm (5/64") hex key. Lines, spaced 2 mm apart, are engraved on the housing as a rough guide for how far the carriage has been translated. These collimation adapters use an extra-thick SM1-threaded or SM2-threaded retaining ring designed for holding aspheric condenser lenses. The retaining rings can be tightened or loosened using either an SPW602 (Ø1" versions) or SPW604 (Ø2" versions) spanner wrench.

The threading on the input and output apertures remain fixed during translation, allowing these adapters to be mounted between fixed lens tubes. These apertures are threaded for compatibility with various components; please see the table below for details.

Inserting or Removing Optics

To insert or remove an optic in these collimation adapters, use the adjustment ring to translate the inner carriage to the output end of the housing. Remove the included retaining ring using the spanner wrench. If there is a lens installed already, remove it from the carriage. Insert another Ø1" (Ø25 mm) or Ø2" (Ø50 mm) optic into the carriage, and use the retaining ring to secure it.

Using a lens with a substrate or AR coating that does not transmit the wavelength of your LED is not recommended. Deep UV LEDs (wavelengths \leq 340 nm) require a lens fabricated from UV Fused Silica, since many standard varieties of glass do not transmit below 350 nm. IR LEDs that emit at wavelengths \geq 1050 nm can be collimated using an uncoated condenser lens, such as the Ø50 mm ACL50832U which has a wavelength range of 380 - 2100 nm.

| Item # | Compatible Optic | Lens Travel Range | Input Threading | Output Threading | Included Lens | AR Coating Range | Lens Focal Length | Operating Temperature | Diagram |
|-------------------|------------------|-------------------|---------------------------------------|---------------------------------------|---------------|------------------|-------------------|-----------------------------|---------|
| SM1U ^a | Ø1" (Ø25 mm) | 11 mm (0.43") | External SM1 (1.035"-40) | Internal SM2 (2.035"-40) ^b | N/A | N/A | N/A | 15 - 60 °C (Non-Condensing) | |
| SM1U25-A | | | | | ACL2520U-A | 350 - 700 nm | 20.1 mm | | |
| SM1U25-B | | | | | ACL2520U-B | 650 - 1050 nm | 20.1 mm | | |
| SM2F ^a | Ø2" (Ø50 mm) | 20 mm (0.79") | External SM1 (1.035"-40) ^c | Internal SM2 (2.035"-40) ^d | N/A | N/A | N/A | | |
| SM2F32-A | | | | | ACL50832U-A | 350 - 700 nm | 32.0 mm | | |
| SM2F32-B | | | | | ACL50832U-B | 650 - 1050 nm | 32.0 mm | | |

- a. The SM1U and SM2F do not include a collimation optic, allowing user-supplied optics, such as our aspheric condenser lenses, to be integrated with Thorlabs' mounted LEDs.
- b. This thread is part of a removable adapter; removing the adapter reveals internal M34 x 0.5 threading. The SM1A38 thread adapter can be used in place of this adapter for SM1 compatibility
- c. This thread is part of a removable adapter; removing the adapter reveals external SM2 (2.035"-40) threading.
- d. This thread is part of a removable adapter; removing the adapter reveals internal M62 x 0.75 threading.

| Part Number | Description | Price | Availability |
|-------------|---|----------|--------------|
| SM1U | Adjustable Collimation Adapter for Ø1" or Ø25 mm Optic | \$277.78 | Today |
| SM1U25-A | Adjustable Collimation Adapter with Ø1" Lens, AR Coating: 350 - 700 nm | \$295.20 | Today |
| SM1U25-B | Adjustable Collimation Adapter with Ø1" Lens, AR Coating: 650 - 1050 nm | \$295.20 | Today |
| SM2F | Adjustable Collimation Adapter for Ø2" or Ø50 mm Optic | \$275.08 | Today |
| SM2F32-A | Adjustable Collimation Adapter with Ø2" Lens, AR Coating: 350 - 700 nm | \$292.82 | Today |
| SM2F32-B | Adjustable Collimation Adapter with Ø2" Lens, AR Coating: 650 - 1050 nm | \$292.82 | Today |

| LED Quick Links |
|------------------------------------|
| Mounted LEDs |
| Deep UV (265 - 340 nm) |
| UV (365 - 405 nm) |
| Cold Visible (420 - 565 nm) |
| Warm Visible (590 - 730 nm) |
| IR (780 - 1550 nm) |
| White (400 - 700 nm) |
| Broadband (470 - 940 nm) |
| LED Collimation^a |
| Adjustable Collimation Adapters |
| Microscope Collimation Adapters |
| LED Mating Connector |
| LED Drivers |

- We offer suggestions for how to collimate most of our LEDs.

Click on the info icons () above for details.

Microscope Collimation Adapters with Ø50 mm Lens

- ▶ AR-Coated Aspheric Lens with Low f/# (Approximately 0.8)
- ▶ Compatible with Select Leica, Nikon, Olympus, or Zeiss Microscopes
- ▶ Easily Adjust Beam Collimation / Focus
- ▶ Requires SM2T2 Coupler and SM1A2 Adapter (Each Sold Separately) when Used with the LEDs Above



Click for Details
 Installation of a collimation adapter to a mounted LED using the SM2T2 and SM1A2 thread adapters. The same setup can be used to attach the collimation adapter to the LEDs above that use a Ø57.0 mm housing.

Thorlabs offers collimation adapters with Ø50 mm AR-coated aspheric condenser lenses (EFL: 40 mm) for collimating the output from the mounted LEDs sold above. Two AR coating ranges (350 - 700 nm and 650 - 1050 nm) and four different collimator housings are available. Each housing is designed with a dovetail or bayonet mount to mate to the illumination port on selected Olympus*, Leica, Nikon, or Zeiss microscopes. Compatible microscopes are listed in the Collimation Adapter Selection Guide table below.

Using an adapter with a substrate or AR coating that does not transmit the wavelength of your LED is not recommended. Deep UV LEDs (M265L3, M280L3, and M340L3) require a lens fabricated from UV Fused Silica, since many standard varieties of glass do not transmit below 350 nm. IR LEDs that emit beyond 1050 nm (M1200L3, M1300L3, M1450L3, and M1550L3) can be collimated using an uncoated condenser lens; the ACL5040U is an uncoated version of the Ø50 mm lenses used in the collimation packages below that has a wavelength range of 380 - 2100 nm. See the *Collimation Adapter* tab in the info icons above for additional collimation options.

The LED sources described above can be fitted to the collimators by using an SM2T2 Coupler and SM1A2 Adapter (not included) as shown in the image at right. This assembly can be easily adapted to different LED sources by unscrewing the LED housing.

*Please note that due to the optical design of the transmitted lamphouse port of the BX and IX microscopes, it may be necessary to purchase a separate adapter, which is available from Olympus.

| |
|------------------------------------|
| LED Quick Links |
| Mounted LEDs |
| Deep UV (265 - 340 nm) |
| UV (365 - 405 nm) |
| Cold Visible (420 - 565 nm) |
| Warm Visible (590 - 730 nm) |
| IR (780 - 1550 nm) |
| White (400 - 700 nm) |
| Broadband (470 - 850 nm) |
| LED Collimation^a |
| Adjustable Collimation Adapters |
| Microscope Collimation Adapters |
| LED Mating Connector |
| LED Drivers |

a. We offer suggestions for how to collimate most of our LEDs. Click on the info icons () above for details.

Collimation Adapter Selection Guide

| Compatible Microscopes | | | Olympus BX & IX ^a | Leica DMI | Zeiss Axioskop & Examiner ^b | Nikon Eclipse Ti |
|---|--------------------------|--------------------|------------------------------|----------------------|--|----------------------|
| AR Coating Range of Condenser Lens | Lens Focal Length | Lens Item # | Click to Enlarge | Click to Enlarge | Click to Enlarge | Click to Enlarge |
| 350 - 700 nm | 40.0 mm | ACL5040U-A | COP1-A | COP2-A | COP4-A | COP5-A |
| 650 - 1050 nm | 40.0 mm | ACL5040U-B | COP1-B | COP2-B | COP4-B | COP5-B |

- a. Please note that due to the optical design of the transmitted lamphouse port of the BX and IX microscopes it may be necessary to purchase a separate adapter which is available from Olympus.
- b. These adapters are compatible with any Zeiss microscopes that use the same dovetail as the Zeiss Axioskop or Examiner microscopes.

| Part Number | Description | Price | Availability |
|-------------|--|----------|--------------|
| COP1-A | Collimation Adapter for Olympus BX & IX, AR Coating: 350 - 700 nm | \$205.19 | Today |
| COP1-B | Collimation Adapter for Olympus BX & IX, AR Coating: 650 - 1050 nm | \$239.58 | Today |
| COP2-A | Collimation Adapter for Leica DMI, AR Coating: 350 - 700 nm | \$205.19 | Today |
| COP2-B | Collimation Adapter for Leica DMI, AR Coating: 650 - 1050 nm | \$239.58 | 7-10 Days |
| COP4-A | Collimation Adapter for Zeiss Axioskop & Examiner, AR Coating: 350 - 700 nm | \$205.19 | Today |
| COP4-B | Collimation Adapter for Zeiss Axioskop & Examiner, AR Coating: 650 - 1050 nm | \$239.58 | Today |
| COP5-A | Collimation Adapter for Nikon Eclipse Ti, AR Coating: 350 - 700 nm | \$242.90 | Today |
| COP5-B | Collimation Adapter for Nikon Eclipse Ti, AR Coating: 650 - 1050 nm | \$281.73 | Today |
| SM1A2 | Adapter with External SM1 Threads and Internal SM2 Threads | \$26.51 | Today |
| SM2T2 | SM2 (2.035"-40) Coupler, External Threads, 1/2" Long | \$38.55 | Lead Time |


Mounted LED Mating Connector



- ▶ Female 4-Pin Pico (M8) Receptacle
- ▶ M8 x 1 Thread for Connection to Mounted LED Power Cable
- ▶ M8 x 0.5 Panel-Mount Thread for Custom Housings
- ▶ 0.5 m Long, 24 AWG Wires
- ▶ IP 67 and NEMA 6P Rated

The CON8ML-4 connector can be used to mate mounted LEDs featured on this page to user-supplied power supplies. We also offer a male 4-Pin M8 connector cable (item # CAB-LEDD1).

| Pin | Color | Specification |
|-----|-------|---------------|
| 1 | Brown | LED Anode |
| 2 | White | LED Cathode |
| 3 | Black | EEPROM GND |
| 4 | Blue | EEPROM IO |



CON8ML-4 Shown Connected to the 4-Pin M8 Plug of Mounted LED


| Part Number | Description | Price | Availability |
|-------------|--|---------|--------------|
| CON8ML-4 | 4-Pin Female Mating Connector for Mounted LEDs | \$34.11 | Today |

Spectrum

Specs

Drawing

Collimation Adapter

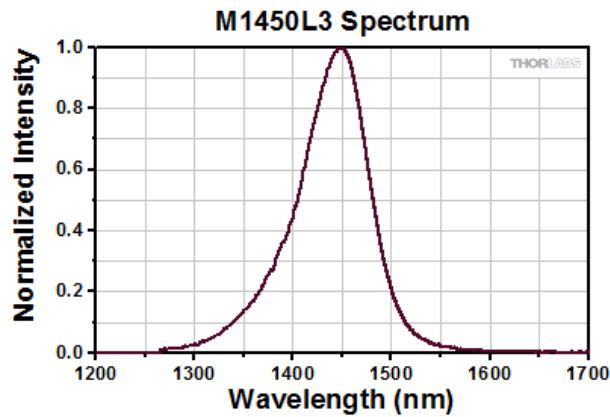Auto CAD
PDFAuto CAD
DXF

Solidworks



eDrawing



Step

Spec
SheetCatalog
Page

Spectrum

Specs

Drawing

Collimation Adapter

M1450L3 Characteristics

| Optical Specifications | MIN | TYP | MAX | UNIT |
|--|------|------|------|---------------------------|
| Nominal Wavelength ^a | - | 1450 | - | nm |
| Peak Wavelength ^b | 1400 | 1450 | 1500 | nm |
| Bandwidth (FWHM) | - | 80 | - | nm |
| LED Output Power ^c | 31 | 36 | - | mW |
| Viewing Angle (Full Angle at Half Max) | - | 136 | - | deg |
| Maximum Irradiance ^d | - | 0.4 | - | $\mu\text{W}/\text{mm}^2$ |
| Electrical Specifications | | | | |
| Current (CW) | - | - | 700 | mA |
| Forward Voltage | - | 1.15 | - | V |
| Electrical Power | - | 805 | - | mW |

General Specifications

| Characteristic | Value |
|--|----------------------------------|
| Emitter Size | 1 mm x 1 mm |
| Lifetime ^e | >10 000 h |
| Operating Temperature (Non-Condensing) | 0 to 40 °C |
| Storage Temperature | -40 to 70 °C |
| Risk Group ^f | RG0 - Exempt Group |
| Housing Diameter | Ø30.5 mm |
| Mechanical Compatibility | SM1 (1.035"-40) Internal Threads |
| Cable Length | 2 m |

a. Due to variations in the manufacturing process and operating parameters such as temperature and current, the actual spectral output of any given LED will vary. The nominal wavelength is only intended to be used as a guideline.

b. When Driven with a Current of 500 mA

c. When Driven with the Test Current

d. Measured at a Distance of 200 mm

e. Thorlabs defines the lifetime of our LEDs as B_{50}/L_{50} , meaning that 50% of the LEDs with a given item # will fall below 50% of the initial optical power at the end of the specified lifetime. Please see the *Stability* tab for more details.

f. According to the Standard IEC 62471:2006, Photobiological Safety of Lamps and Lamp Systems

Auto CAD
PDFAuto CAD
DXF

Solidworks



eDrawing



Step

Spec
SheetCatalog
Page

| Spectrum | Specs | Drawing | Collimation Adapter |
|----------|-------|---------|---------------------|
|----------|-------|---------|---------------------|

A-A 1:1

35.0 mm (1.38")

Cable Feedthrough

Internal SM1 (1.035"-40) Threads, 6 mm Deep

3.4 mm (0.13")

6.5 mm (0.26")

9.9 mm (0.39")

6.0 mm (0.24")

50.0 mm (1.97")

59.9 mm (2.36")

Ø30.5 mm (Ø1.20")

This LED features a Ø30.5 mm heat sink.



[Spectrum](#)
[Specs](#)
[Drawing](#)
[Collimation Adapter](#)

This mounted LED is compatible with two adjustable collimation adapters with SM2 compatibility as well as a DIY adapter assembly that features a small profile and SM1 compatibility.

Compatible Collimation Adapters

| Type | Adjustable Adapters | |
|------------------|---------------------|-------------------|
| Item # | SM1U ^a | SM2F ^a |
| Compatibility | SM2 | |
| Compatible Optic | Ø1" (Ø25 mm) | Ø2" (Ø50 mm) |

a. Note that this collimation adapter does not include a lens; purchase a compatible optic, such as one of our [aspheric condenser lenses](#), separately.

DIY SM1-Threaded Collimation Assembly (1" Optic)

| Item # | Qty. | Description |
|--------------------------|------|---|
| ACL2520U or ACL2520U-DG6 | 1 | Aspheric Condenser Lens (with or without Diffuser) |
| SM1V05 ^a | 1 | Ø1" Rotating Adjustable Length Lens Tube, 1/2" Long |
| SM1L03 ^a | 1 | Ø1" Lens Tube, 0.30" Long |
| SPW801 | 1 | Adjustable Spanner Wrench |

a. The SM1V10 Adjustable Lens Tube can be substituted for both the SM1V05 and SM1L03; however, the translation range of the optic cell will be reduced from 7.6 mm to 6 mm, and an additional SM1RR retaining ring must be purchased.

DIY Collimation Assembly Instructions

To install the optic in the adjustable lens tube, first use the spanner wrench (SPW801) to adjust a retaining ring (SM1RR) fitted in the lens tube so that it is closer to the inside lip of the tube. Carefully place the lens inside the lens tube with the curved side facing away from the male-threaded end of the tube.

Secure the lens in place with another retaining ring (SM1RR) using the spanner wrench. Note: Do not use the SPW602 spanner wrench, as the thin SM1RR retaining ring does not provide sufficient clearance for the SPW602 to avoid scratching the steeply curved surface of the lens.

Thread the SM1L03 lens tube into the LED and gently tighten it. Partially thread the SM1V05 adjustable length lens tube assembly into the LED assembly.

