



FINAL INSPECTION REPORT

1x2 Wavelength Combiner / Splitter (WDM)

Item #: WD1525A
SN: T019828

Center Wavelength
White Port: 1550 nm
Red Port: 1625 nm
Maximum Optical Power^a
With Connectors or Bare Fiber: 1 W
Spliced: 5 W
Fiber Type: Corning SMF-28E+

Test Data at Center Wavelength ^b		
Port Jacket Color	White	Red
Wavelength	1550 nm	1625 nm
Transmission ^c	94.6%	96.4%
Insertion Loss ^d	0.24 dB	0.16 dB
Isolation ^e	19.7 dB	17.6 dB

Test Data over Bandwidth ^b		
Bandwidth	1545-1555 nm	1620-1630 nm
Transmission ^c	93.8%	94.8%
Insertion Loss ^d	0.28 dB	0.23 dB
Isolation ^e	16.3 dB	15.4 dB

a. Specifies the maximum power allowed through the component. Performance and reliability under high power conditions must be determined within the user's setup.



b. All values are measured at room temperature without connectors.

c. Calculated from measured insertion loss data below.

d. Insertion loss is the ratio of the input power to the output power for each port of the wavelength combiner / splitter (WDM).

e. Isolation represents the minimum crosstalk between ports.

Verified by: _____

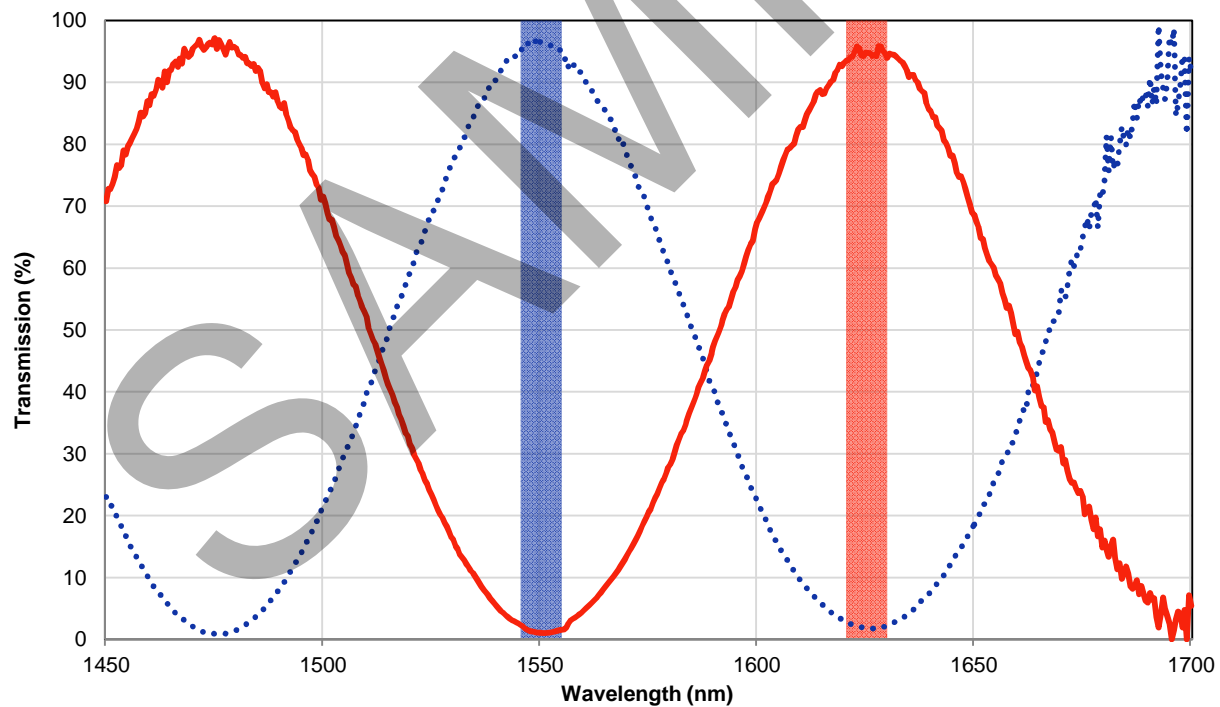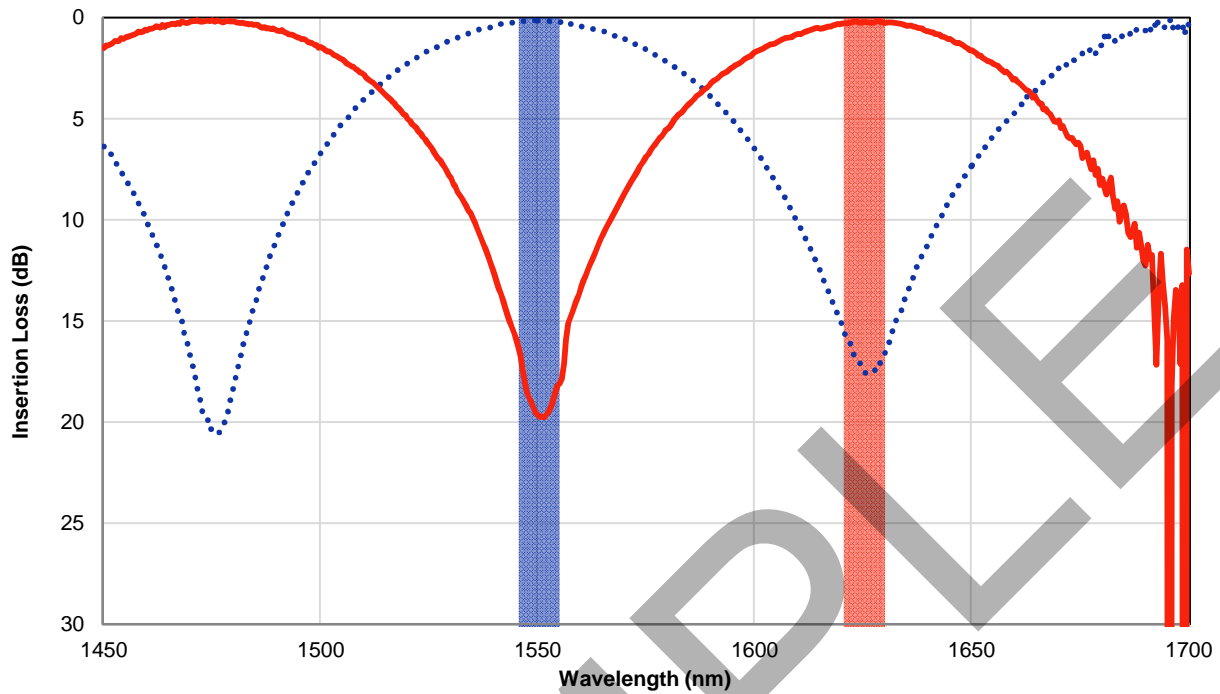

This wavelength combiner / splitter (WDM) operation is only guaranteed over the specified bandwidth as defined by the colored regions above. Thorlabs displays a wider wavelength range to provide insight into how this particular device would perform if used outside its guaranteed operating range. The out-of-band performance can vary from device to device.